




ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION
WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED
WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC
TECHNOLOGY.

SPC-F005.DWG

REVISIONS

DOC. NO. SPC-F005 * Effective Date: 07/25/06 : 1398

| CP # | REV | DESCRIPTION | DRAWN | DATE | CHECKD | DATE | DATE |
|------|-----|-------------|-------|----------|--------|----------|-------|
| 876 | A | RELEASED | EO | 07/25/06 | SA | 07/25/06 | 05/06 |

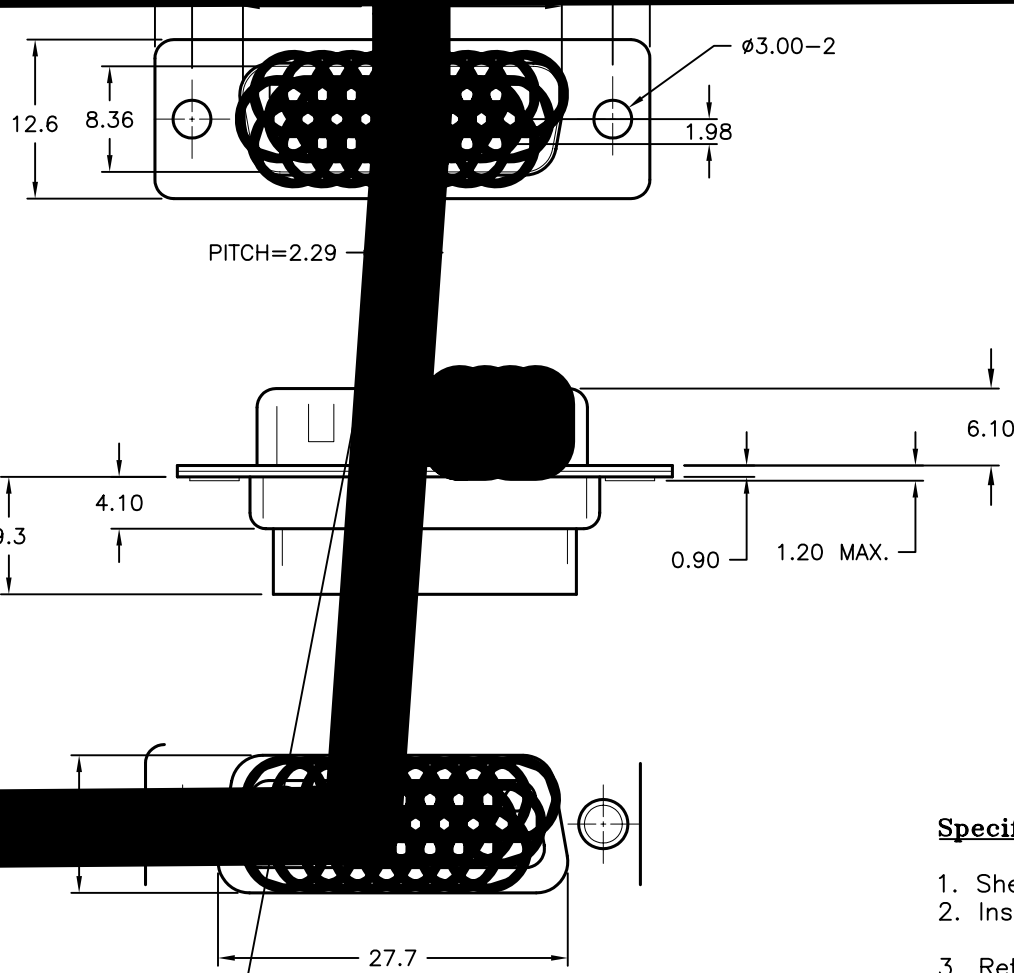

Specifications:

1. Shell: Steel, Tin Plated
2. Insulator: PBT +30% Fiber Glass, Black UL94V-0 Rated
3. Retention Springs: Stainless Steel

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED
HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE
BELIEVE TO BE ACCURATE AND RELIABLE. SINCE
CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE
USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT
FOR THE INTENDED USE AND ASSUME ALL RISK AND
LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

Unless Otherwise Specified

.X ± 0.2 [0.008]

.XX ± 0.12 [0.005]

| | |
|--------------|----------|
| DRAWN BY: | DATE: |
| EKLAS ODISH | 07/25/06 |
| CHECKED BY: | DATE: |
| SAMI ALNADI | 07/25/06 |
| APPROVED BY: | DATE: |
| HISHAM ODISH | 07/25/06 |

DRAWING TITLE:
26 Pin High-Density D-Sub Crimp Type Plug

| | | | |
|------|----------|-----------------|-----|
| SIZE | DWG. NO. | ELECTRONIC FILE | REV |
| A | SPC15255 | 79K4852.DWG | A |

SCALE: NTS U.O.M.: mm [INCHES] SHEET: 1 OF 1