

FEATURES

- Insulation Resistance >= 100 MΩ
- Brass nickel plated coupling nut

RS PRO M12 MALE STRAIGHT TO MALE STRAIGHT 4 PIN 4 WIRE 5m 0.34 sq. mm PVC SHIELDED CABLE

RS Stock No.: 2500717



RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.



Product Description ATTRIBUTE 1

M12 Connector Cable Assembly

Brought to you under the trusted RS Brand, this range of M12 connector cable assemblies are commonly used in sensor and automation equipment. Fitted with a secure coupling nut, these RS M12 cable assemblies are an ideal solution for when reliable data transference is needed.

The M12 connector boasts a high degree of environmental protection, and is ideal for industrial use, with applications ranging from process control to commercial electronics.

Features and Benefits:

- Insulation Resistance >= 100 $M\Omega$
- · Brass nickel plated coupling nut

General Specifications

| Rated Operational Voltage | 250 V |
|---------------------------|-------------|
| Current Rating | 4A |
| Insulation Resistance | >= 100 MΩ |
| Temperature Range | -25°C +75°C |
| Tightening Torque | 0.6 Nm |
| Coding | A-Coded |

Material Specifications

| Grip Material | PU |
|-----------------|---------------------|
| Contact | Cu-Zn |
| Contact Plating | Gold Flash |
| Contact Carrier | Nylon 66 |
| Grip Color | Black |
| Coupling Nut | Brass Nickel-Plated |

Cable Specifications

| Cable Length-L | 5 m |
|-----------------------|----------------------------------|
| Cable Type | 4 Core PVC Shielded Multi Strand |
| Sheath Color | Black |
| Cross Section of Wire | 0.34 sq. mm |
| Core Dia | 1.35 mm |


RS PRO M12 MALE TO MALE CONNECTOR



| Cable Dia | 4.8 ± 0.1 mm |
|----------------|------------------------------|
| Chield Details | Polyester Tape (12 x 25 MIC) |
| Shield Details | Braiding (16 x 4 x 0.12 mm) |

| Protection Category | | |
|------------------------|-----------------|--|
| Degree of Protection | IP67 | |
| Additional Information | | |
| Custom Tariff Number | 85369090 | |
| Approvals | | |
| Standards Met | IEC 61076-2-101 | |

Connection Diagrams / Assembly Diagrams / Illustrations / Accessories

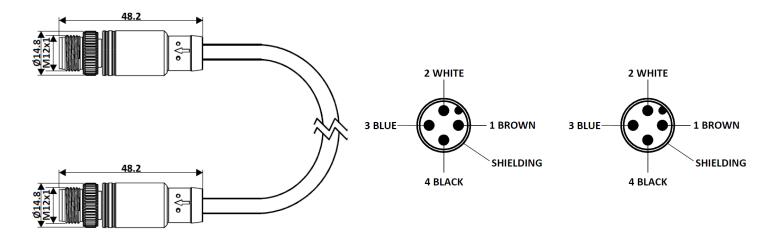

All Dimensions are in mm.