



Datasheet

RS PRO 50cm USB 3.1 Type A Male to USB 3.1 Type C Male Cable

Stock number: 182-8915


EN

The RS PRO 50cm USB version 3.1 type A male to type C male cable has a white PVC jacket and connector hoods. The cable flex has copper wire conductors and drain wire, with an aluminium braid, foil shielding and has an outer diameter of 4.5mm.

The connectors are nickel and have a strain relief to help avoid the cable splitting around the edge of the boot.

USB 3.1 supports Alternative Mode commonly known as Alt Mode which allows a 4K digital signal native to DisplayPort, which with the help of other adapters can be convert to other video signal, but the port it is connected must also support Alt Mode.

USB 3.1 also supports 20 volt, 3 amp power delivery.

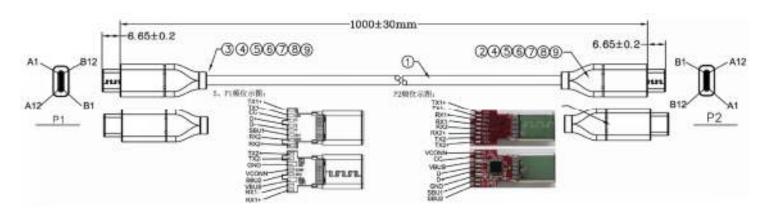



9	USB TYPE C~SOLDER TYPE~ Tin Plating Nickel up ~ (No riveting claw)
B	USB TYPE C~SOLDER TYPE~ Tin Plating Nickel Down~ (No riveting claw)
	ISS TEPE-C coble Small closp (use TEPE-C) testure: NT-66+15AGF. 24-32-34AAG
(B)	H.S.T £ 2.0 Thin wall
3	TRANSPARENT PE ROHS LDPE
(4)	45P White PVC ROHS
3	USB 3.1 C Type Connector With ~PCBA(N) 10) ,full PIN
Ø	USB 3.1 C Type Connector With -PCBA, with IC (IC:VIA) field PIN
0	WIRL 1" (SURFOLD), OFFCHARD 40*-ISANO (7/1), 46YC + 3*-SANNE (1/1), \$MITCH 46*-ISANE C1/0, OFFCHARD (6/16/1), 08 WINDO (3)-4, 1986" WHITE YOU MAKE SIK

RoHS / REACH / CE