
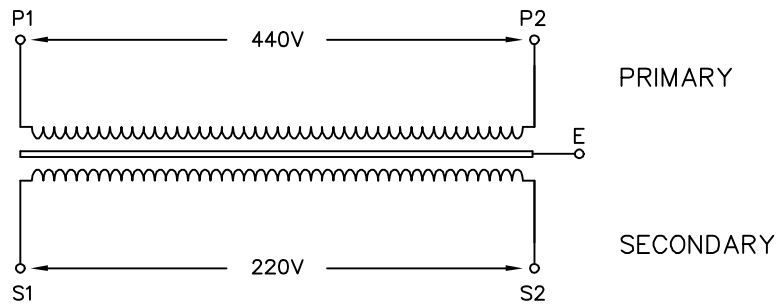
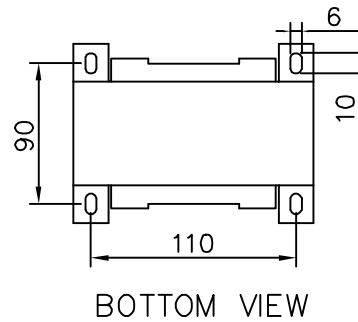

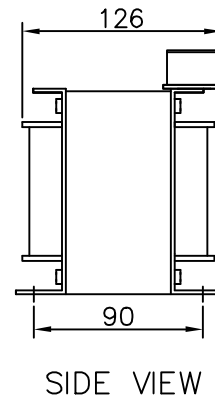


NOTE: ALL OUTLOOK & DIMENSION ARE SUBJECT TO MINOR CHANGES.
ALL THE DIMENSION IN MM.

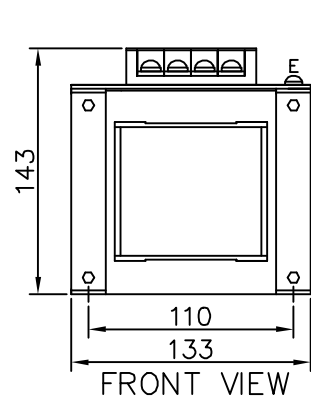

TYPE	DRY TYPE ISOLATION TRANSFORMER	
RATING	CONTINUOUS	
CAPACITY	400	VA
PHASE	1	
PRI VOLTAGE	440	VAC
PRI AMPERE	0.91	A
PRI TAPS	-	
PRI TERMINAL	P1, P2	
SEC VOLTAGE	220	VAC
SEC AMPERE	1.82	A
SEC TERMINAL	S1, S2	
FREQUENCY	50/60	Hz
INSULATION CLASS	F (155°C)	
AMBIENT TEMP.	40	°C
TEMP. RISE (MAX)	100	°C
IMPEDANCE, Z	4 ~ 5	%
TOTAL LOSS	35	W
EFFICIENCY	92	%
VENTILATION	AIR NATURAL	
WINDING MATERIAL	COPPER	
PROTECTION	IP 00	
CABLE ENTRY	-	
ENCLS MATERIAL	-	
ENCLS FINISHING	-	
WEIGHT	6.9	KG
STANDARD	IEC 61558-1	

Dwg Title:

400VA 1PH 440V/220V ISOLATION TRANSFORMER DRAWING & SPECIFICATION