

## FEATURES

- Single row tapered roller bearing
- Accommodates combined radial and axial loads
- Low frictional moments during operation
- Seperable rings
- Pressed steel cage

## Tapered Roller Bearing 75x130x27.25mm

RS Stock No.: 2482773




RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

## Product Description

A range of RS Pro single row Tapered Roller Bearings, offering versatility and overall high performance. RS Pro Tapered Roller bearings utilise a high strength steel cage and optimised internal geometry to ensure adequate operation.

## General Specifications

<b>Bearing Type</b>	Single Row Tapered Roller Bearing
<b>Number of Rows</b>	1
<b>Material</b>	Steel
<b>Race Type</b>	Tapered
<b>Bore Type</b>	Cylindrical
<b>Application</b>	Pumps, Gearboxes, Motors
<b>Material of cage</b>	Pressed steel

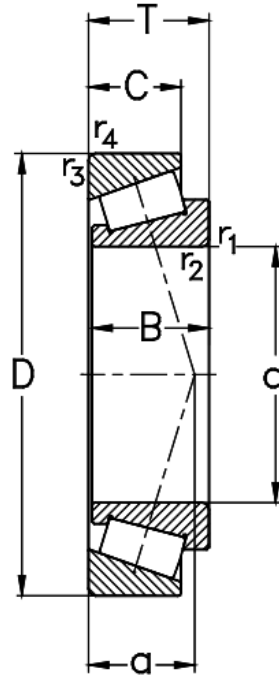

## Mechanical Specifications

Inside Diameter (d)	75mm
Outside Diameter (D)	130mm
Cone Width (B)	25mm
Cup Width (C)	22mm
Assembled Width (T)	27.25mm
Dynamic Load Rating	150kN
Static Load Rating	189kN
Limiting Speed	5000rpm
Mass	1.4kg

## Operation Environment Specifications

Temperature Range	-15°C to 120°C
-------------------	----------------

INCLUDES WITH PRODUCT / STANDARD ACCESSORIES /  
CONSTRUCTIONAL DIAGRAM