



**ENGLISH** 

### **Datasheet**

# RS PRO NETWORK PATCH CABLE, CAT 6, 550MHz, UTP, STRANDED BUBBLE BOOT MOD 8P8C PLUG TO PLUG 36" GRAY

Stock No: 2378611, 2378612



### **Product Details:**

RS PRO RJ45 network path cords are compliant with the latest standards, meeting and exceeding a full range of patching performance requirements of Cat5e and Cat6. Cable are available with and without snagless boots, different length and colors to accommodate your application.

#### Features & Benefits:

- Compliance with the TIA/EIA T-568B or 568C
- UTP 24AWG stranded conductors for flexibility, twisted in pairs and nested in a spline to minimize crosstalk
- Support Bandwidth 250MHz & Transmitting data at speeds of up to 1000 Mbps (or 1 Gigabit per second)
- Compatible With 100 Base / 1000 Base T (gigabit) Networks
- Gold plated for accurate data transfer and corrosion-free connectivity

#### SPECIFICATION:

Material:

Plugs:

P1 & P2: RJ45, 8P8C, CAT 6 Plug, Long Body, Polycarbonate, Rated UL94V-0, Gold plated

Boot: PVC, Bubble style

Cable:

Cat 6, UTP 24 AWG X 4P, Stranded bare Copper, 550MHz

O.D.: 5.9mm ±0.15mm, UL & ETL verified, conforms

to ANSI/TIA-568-C.2 Jacket color (See Chart)

**Electrical:** 

Hi-Pot: 300V DC / 10ms


CROSS SECTION

100% tested for Open, shorts and crossed wires

**Environmental:** 

Lead free, RoHS compliant.

## **Dimensional line drawings**

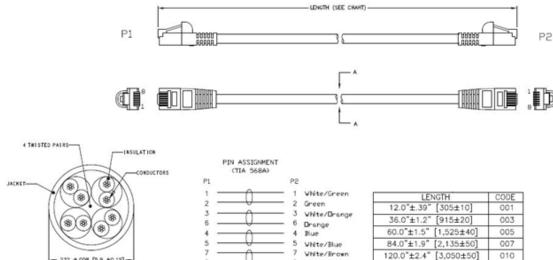

LENGTH	CODE
12.0"±.39" [305±10]	001
36.0"±1.2" [915±20]	003
60.0"±1.5" [1,525±40]	005
84.0"±1.9" [2,135±50]	007
120.0"±2.4" [3,050±50]	010
168.0"±2.4 [4,270±60]	014
300.0"±2.4" [7,625±60]	025
600.0"±2.7 [15,250±70]	050
1,200.0"±2.7" [30,500±70]	100

0.0	100	CODE
CC	LOR	CODE
BI	LUE	BU
OR.	ANGE	OR
WH	HITE	WT
BL	ACK	BK
R	ED	RD
GR	EEN	GR
G	RAY	GY
PU	RPLE	PU





# General

Extra page for more complex



