

Product Specification

ACEsafeT **First** "Air MWG15" Nitrile Micro Foam Palm Coated 15G Mechanical Glove



General

Brand / Model	AcesafeT / Air MWG15
Size available	8/M - 120mm Width 9/L - 130mm Width 10/XL - 134mm Width
Category Code	CE EN 388:2016 EN 420: 2003 Cat II

Materials

Lining	15G Spandex plus Nylon
Binding	Polyester
Coating	Nitrile Foam
Gauge	15
Cuff	Elastic Knit (Green for 8/M, Yellow for 9/L & Brown for 10/XL)

Product Specification

ACEsafe T fist "Air MWG15" Nitrile Micro Foam Palm Coated 15G Mechanical Glove



General

EN 388:2016


Numbering

Abrasion

Blade Cut

Tear Strength

Puncture




4
1
3
1

EN 388:2016



4 X 4 2 C P

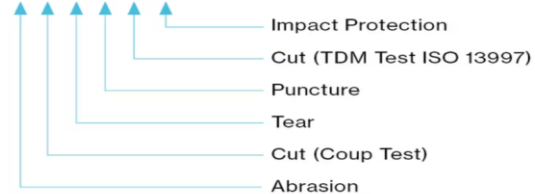

Rating

P, F, X
A-F
1-4
1-4
1-5
1-4

Protection limit :

Users should be warned that gloves should not be worn when there is a risk of entanglement by moving parts of machines.

This model does not contain any substances at levels that are known to, or suspected to, adversely affect user hygiene or health.

The protection against risks or hazards which are not mentioned in this document is not warranted.

These levels of performance are obtained from the tests done according to conditions defined by the applicable standards.

The levels of performance mentioned are only valid for new gloves, not washed, nor regenerated.

Before use, the glove shall be visually inspected for any defect or imperfections. In case of deterioration, the gloves must be scrapped (abrasion, cut, tear, ...).

No flame protection is claimed. This glove shall not be in contact with naked flame.

For gloves with two or more layers the overall classification does not necessarily reflect the performance of the outermost layer.

The levels of performance against mechanical risks are only valid for the palm of the glove.

Storage and cleaning notice

Keep in its original packaging, under ordinary temperature and humidity conditions and in clean, covered and ventilated premises.

The gloves are not washable.

PPE subject to ageing :

The design performance can not be significantly affect by ageing when stored in appropriate conditions (humidity, temperature, clean , ventilated, light).

Product Specification

ACEsafe T **FIST** "Air MWG15" Nitrile Micro Foam Palm Coated 15G Mechanical Glove

The cut-resistant rating "4543" refers to the older EN388:2003 standard. Under the updated EN388:2016 standard, this rating is typically equivalent to 4X43C or 4543C.

Here is the breakdown of the change:

- **Old Rating (4543):** 4 (Abrasion), 5 (Cut - Coup Test), 4 (Tear), 3 (Puncture).
- **New Rating (4X43C):** 4 (Abrasion), X (Coup test ignored), 4 (Tear), 3 (Puncture), C (TDM Cut Test).

Key Changes to Understand:

- **Cut Level 5 is now C:** The old Coup test (1-5) was replaced by the TDM test (A-F) for higher accuracy, specifically because high-cut materials dull the circular blade, making the old test unreliable.
- **"C" Rating:** A 4543 glove generally falls into the **Cut Level C** category (10-14.9 Newtons) under the new ISO 13997 standard.



EU-TYPE EXAMINATION CERTIFICATE		CTC
The following model of Personal Protective Equipment has been subjected to an EU-type examination in accordance with the module B of the PPE regulation (2016/425) and has been shown to satisfy to essential health and safety requirements.		
Certificate N°	0075/4480/162/12/22/2298	
Issued by CTC, Notified Body N°0075, to the following model of personal protective equipment :		
Manufacturer :		
Description		
PPE Type :	protective glove against mechanical risks	
Product reference :	NR501	
Article code :	/	
Glove description :	15G spandex plus nylon liner with nitrile micro foam palm coating	
Available sizes :	6/XS 7/S 8/M 9/L 10/XL 11/2XL 12/3XL	
Pictures :		
	 41.31X	 9/L Lot : NR501
Reference standard :	Levels of performance / class of protection	
« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material. « 0 » indicates that the glove falls below the minimum performance level for the individual hazard.		
EN ISO 21420:2020	-	
EN 388:2016 + A1:2018	4 1 3 1 X	
At the date of the certificate, the product is in compliance with Annex XVII of REACH regulation (n° 1907/2006 and revisions)		
Full description of the PPE, reference rules verified in the context of the EU-type examination and information given on the product are detailed in the manufacturer's technical file and the Instruction for Use index 01 dated from DECEMBER 2022		
NOTA : Any modification to new items of the personal protective equipment object of this EU type approval certificate or any modification of the information contained in the manufacturer technical file which serves for the deliverance of the EU type approval certificate (change of address, change of company status) should be brought to the attention of the notified body in accordance with Annex V 97.2 of Regulation 2016/425. Any marking on the PPE which is not concerned by the Regulation [UE] 2016/425, is not covered by this certificate.		
Issued in Lyon by Séverine AUBERT CE Expert Team Coordinator	Date of first issue : 28 December 2022 End of validity date : 28 December 2027	
		
		
In application of the Regulation 2016/425 of the European parliament and the Council of 9th March 2016 related to Personal Protective Equipment and repealing the Directive 89/686/EEC.		www.ctcgroupe.com cemarking@ctcgroupe.com
CTC - 4, rue Hermann Frenkel - 69267 Lyon cedex 07 - France Tel: +33 (0)4 72 76 10 10 - Fax: +33 (0)4 72 76 10 00 - ctzyon@ctcgroupe.com Comité Professionnel de Développement Économique (CPDE) Cité Chaussonne Manoir de Garnier Lr 76454 du 02.06.1976 - Siret: 7756972600160 - Code NAF 9412Z - TVA FR 80775649724		