




ENGLISH


Product Datasheet

KY 30-06 WIRE 250V,20AWG 19/0.20mm TC

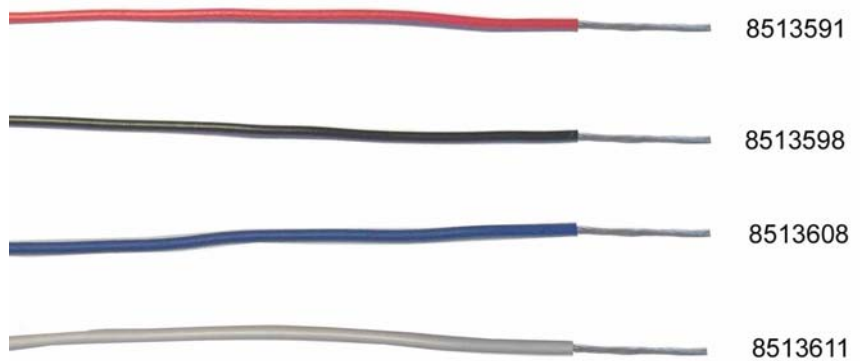

RoHS✓

Cross Section:



Characteristics:

Relevant Standards: NFC 93521 & NFC 32070/C1

Operating Voltage: 250 V

Operating Temperature (°C): -40 to 105 °C

Applications: These wires are mainly designed for internal wiring in electronic equipment.

Construction:

Inner Conductor: Tinned plated copper

Insulation: PVC

Marking: No

Specification:

Conductor				Overall Diameter (mm)		Conductor resistance (Ω/Km, at 20°C)	Mass
Size AWG	Area (mm ²)	O/D (mm)	Stranding (mm)	Min.	Max.	Max.	Average (Kg/Km)
20	0.60	1.00	19/ 0.20	1.60	1.90	36.7	7.4

Product Range:

RS Code

8513591

8513598

8513608

8513611

Description

KY30-06 RED,100M/PAPER REEL

KY30-06 BLACK,100M/PAPER REEL

KY30-06 BLUE,100M/PAPER REEL

KY30-06 WHITE,100M/PAPER REEL