


NO	DESCRIPTION	DATE
⚠	31.9±0.5 → 31.8±0.5	10.20.99'
⚠	BACKGROUND FORMAT UPDATED	02.19.05'
⚠	DEL #4.000 BACKGROUND FORMAT UPDATED	05.10.11'
⚠	DEL PROOF VOLTAGE WORKING VOLTAGE 11.4 → 10.8 ; ADD INSULATION 31.8±0.5 → 30.5±0.5 -40° C TO +60° C → -55° C TO +85° C PDM → TEFLON ; ADD VSWR Ø18.0 → Ø16.0 MODIFICATION PARTS ⑤	08.17.13'

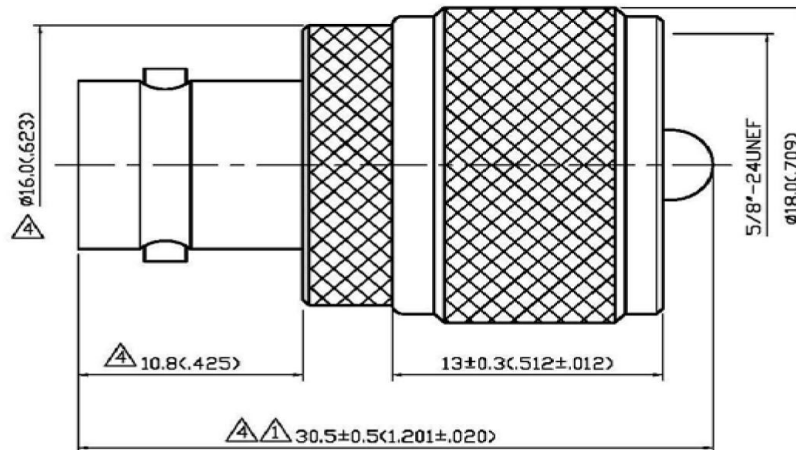

1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-300 MHz
- 1.2 NOMINAL IMPEDANCE: 50 OHMS
- 1.3 VOLTAGE RATING: 500 VOLTS MAX. ⚠
- 1.4 VSWR: 1.3 MAX. ⚠

2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BRASS PER JIS-C3604
- 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710 ⚠

3.0 FINISHES AND OTHERS

- 3.1 SEE BELOW TABLE FOR DETAILS.

4.0 ENVIRONMENTAL

- 4.1 OPERATING TEMPERATURE RANGE: -55° C TO +85° C ⚠

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
6	SHELL	BRASS	1	SILVER 70 μ"MIN.
5	CENTER CONTACT	BRASS	1	GOLD
4	WASHER	BRASS	1	NONE
3	INSULATION II	TEFLON	1	NONE
2	BODY	BRASS	1	SILVER 70 μ"MIN.
1	INSULATION I	TEFLON	1	NONE

APPROVED by _____ DATE: _____



DESCRIPTION		STRAIGHT UHF PLUG-BNC JACK ADAPTER							
製圖	Yoko	TOLERANCE	.X ±0.2	品名	17-19-3 T.G.S	日期	12.23.92'	版次	REV. A-4
檢圖	Ivan	.XX ±0.1	單位	mm(in)	ROHS COMPLIANT <50Ω>	DWG.NO.	17-0081		
認定	Jenny	.XXX ±0.05	比例	4:1					
				ANGLE	±5°				

7902818