

FEATURES

- **Stainless steel (grade 316) housing –both tough and versatile**
- **Black tread on base**
- **Low profile to reduce operator fatigue**
- **Momentary foot switch controller**
- **Change over contacts**
- **Operating Temperature: -5°C to 40°C**

RS PRO General Purpose Momentary Stainless Steel Foot Switch - Stainless Steel Case Material, SP-CO, 3 A Contact

RS Stock No.: 335-325



RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description ATTRIBUTE 1

RS PRO momentary stainless steel foot switches are small and compact and come supplied with 2m of cable. They have Single Pole Double Throw (SPDT) contacts and is IPX7 rating meaning it is protected from water.

General Specifications

Contact Configuration	SP-CO
Switch Operation	Momentary
Case Material	Stainless Steel
Switch Environment	General Purpose
Contact Material	Silver
Colour	Black, Grey
Applications	Foot switches are commonly used in applications where hands-free control is more practical or safer. They can be found on: Industrial machinery and smaller power tools, Hospital beds, Dentist Chairs, Lamps
Cable Connection	2metres of 4 core cable

Electrical Specifications

Contact Voltage Rating (AC)	250V
Contact Voltage Rating (DC)	24V
Contact Current Rating	3A

Mechanical Specifications

Length	90mm
Height	24mm
Dimensions	90mm x 66mm x 24mm
Width	66mm

Operation Environment Specifications

Operating Temperature	-5°C to 40°C
-----------------------	--------------


Protection Category

IP Rating	IPX7
-----------	------

Approvals

Standards Met	2014/35/EU, EN 60950
Compliance/Certifications	RoHS



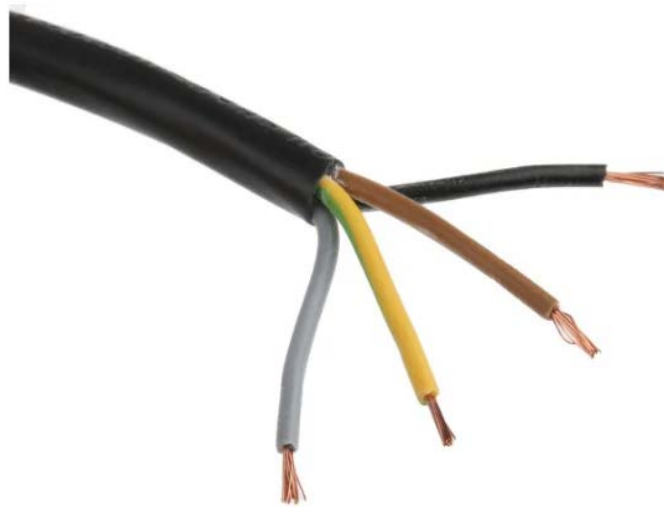

Outline Dimensions

