



# MASTERColour CDM-T Elite



## MASTERC CDM-T Elite 20W/830 G12 1CT/12

Single-ended, very high-efficiency, long-life Ceramic Metal Halide discharge lamp producing crisp white sparkling light with high color rendering

### Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Use only with electronic control gear. 35W & 70W lamps may also use electromagnetic gear.
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information		Color rendering index (CRI)	
Cap-Base	G12 [G12]		84
Operating Position	UNIVERSAL [Any or Universal (U)]	Arc Length O (Nom)	4 mm
Flux measurement reference	Sphere	Operating and Electrical	
Life to 50% Failures (Nom)	20,000 hour(s)	Power Consumption	20.1 W
Light Technical		Voltage (Nom)	95 V
Color Code	830 [CCT of 3000K]	Voltage (Nom)	95 V
Luminous Flux	1,800 lm	Controls and Dimming	
Color Designation	Warm White (WW)	Dimmable	No
Chromaticity Coordinate X (Nom)	0.434	Mechanical and Housing	
Chromaticity Coordinate Y (Nom)	0.398	Bulb Finish	Clear
Correlated Color Temperature (Nom)	3000 K		
Luminous Efficacy (rated) (Nom)	90 lm/W		

# MASTERC colour CDM-T Elite


Bulb Shape	T19 [T 19mm]
<b>Approval and Application</b>	
Energy Efficiency Class	G
Mercury (Hg) Content (Max)	3.5 mg
Mercury (Hg) Content (Nom)	3.5 mg
Energy Consumption kWh/1000 h	21 kWh
EPREL Registration Number	473252

## Product Data

Order product name	MASTERC CDM-T Elite 20W/830 G12 1CT/12
--------------------	--


Full product name	MASTERC CDM-T Elite 20W/830 G12 1CT/12
Full product code	872790087156200
Order code	928183305125
Material Nr. (12NC)	928183305125
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8727900871562
Numerator - Packs per outer box	12
EAN/UPC - Case	8727900871579

## Dimensional drawing



Product	D (max)	D O	L (min)	L (max)	L	C (max)
MASTERC CDM-T Elite 20W/830 G12 1CT/12	20 mm	4 mm	55 mm	57 mm	56 mm	103 mm


## Photometric data

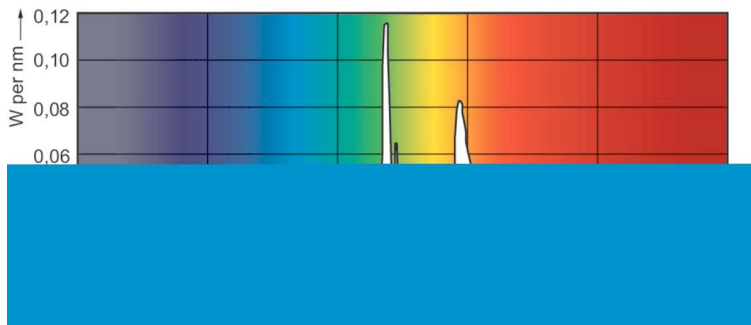

Spectral Power Distribution Colour - MASTERC CDM-T Elite 20W/830 G12 1CT/12

# MASTERC colour CDM-T Elite

## Lifetime

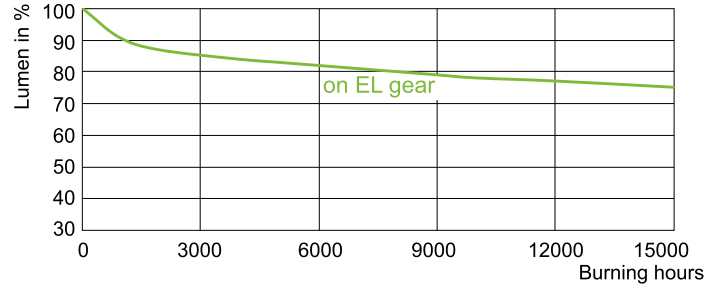

Life Expectancy Diagram - MASTER CDM-T Elite 20W/830 G12 1CT/12

Lumen Maintenance Diagram - MASTER CDM-T Elite 20W/830 G12 1CT/12

