

Datasheet

RS PRO VINYL-FULLY INSULATED (MOLDED EASY ENTRY) DOUBLE CRIMP FEMALE DISCONNECTORS

Stock number: **2055284**

MAXIMUM ELECTRIC CURRENT:

A.W.G.	22	20	18	16
AMP.	3	4	7	10

MAXIMUM ELECTRICAL RATING: 105° C 600 VOLTS MAX.

INSULATION MATERIAL: VINYL


TERMINAL MATERIAL: BRASS

DOUBLE CRIMP: WITH COPPER SLEEVE ON BARREL

TERMINAL/SLEEVE SURFACE TREATMENT: TIN PLATED

INSULATION COLOR: RED

TERMINAL BARREL I.D.: C=1.7MM

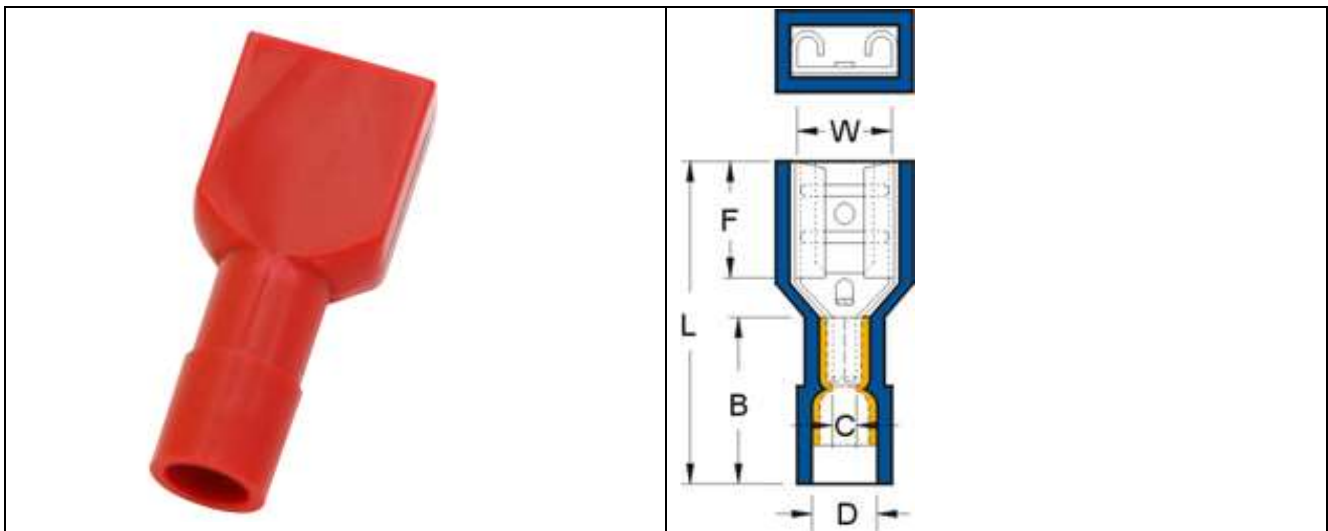

WIRE RANGE A.W.G. mm ²	NEMA TAB	DIMENSION inch(mm)					
		W	F	L	B	D	T
22-16 A.W.G. 0.5-1.5 mm ²	.032X.250 (0.8X6.35)	0.26 6.6	0.295 7.5	0.846 21.5	0.433 11	0.157 4.000	0.016 0.4