




ENGLISH

Product Datasheet

HIGH TEMP. PA TERMINAL BLOCKS WITH WIRE PROTECTOR

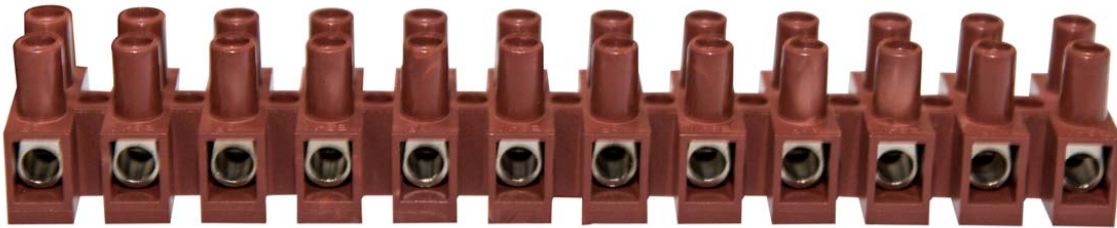

Specification

HOUSING: POLYAMIDE (PA 66) WITH FIBERGLASS

INSERTS: NICKEL PLATED BRASS

SCREWS: GALVANISED STEEL

TEMP.: 160°C

COLOR: DARK BROWN

Standard: VDE

Features:

SEMI-RIGID,;

FLAME RETARDANT;


HIGH TEMPERATURE,;

ALL SCREWS ARE CAPTIVE & RAISED FOR EASY WIRING;

WITH WIRE PROTECTORS



Dimensions

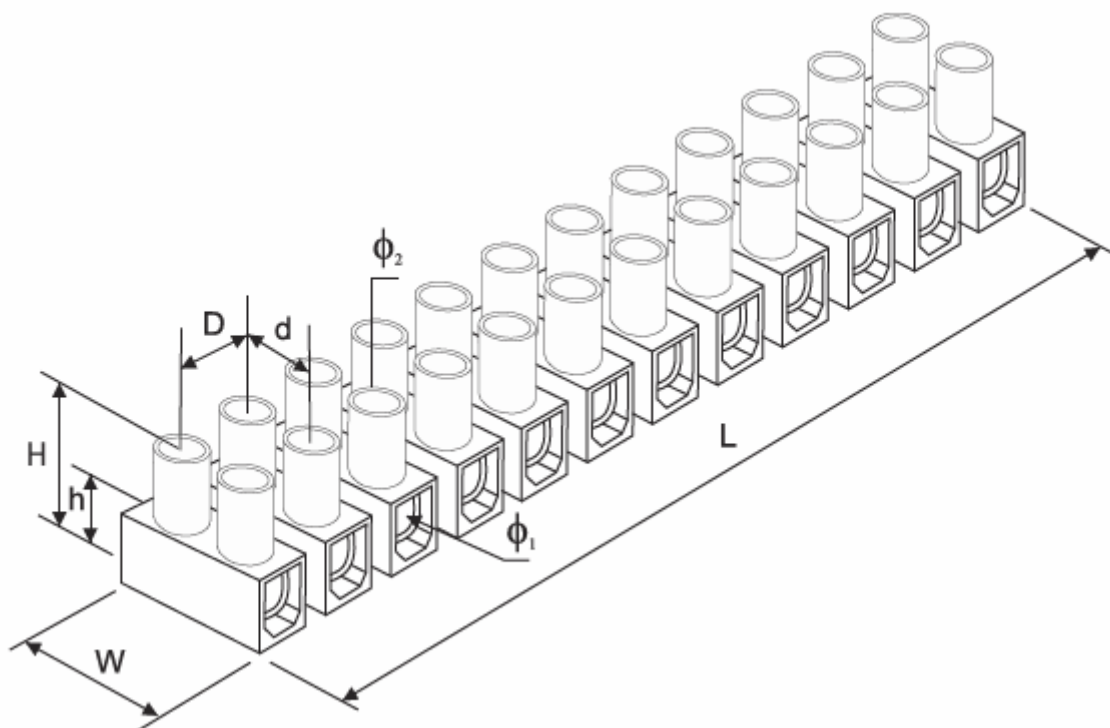

RS CODE	CROSS SECTION	CURRENT RANGE	RATED VOLTAGE	DIMENSIONS (mm)							
				W	L	Φ1	Φ2	D	d	H	h
8407939	1.5 mm ²	17.5A	450V	17.8	92.5	3.6	4.2	7.8	6.5	15	8.3
8407948	2.5 mm ²	24A	450V	20	115	3.5	4.6	10	7.7	16	9
8407941	4 mm ²	32A	450V	24	138	4.4	4.5	11.8	10	19	10.6
8407945	6 mm ²	41A	450V	25.6	156	5	4.2	13.2	10.8	25	14.2

Cross Section: rated for rigid wire and cables (if for flexible wire, it should be reduced one-step, i.e. 6mm² is 4mm²)
Φ1 wire entry hole diameter **Φ2** fixing hole diameter