


Datasheet

Electro Mechanical Buzzer

RS Stock number [780-0712](#)

Dimensions(mm):

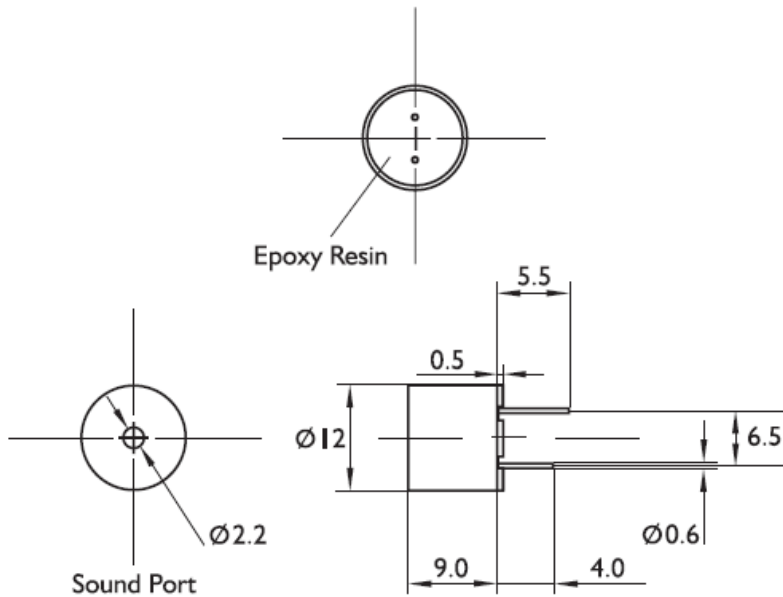

Specifications:

| | |
|-----------------------------------|--------------------|
| Rated Voltage (Vp-p square wave): | 5Vp-p |
| Operating Voltage: | 3~8Vp-p |
| Rated Current at Rated Voltage: | $\leq 40\text{mA}$ |
| Sound Output at 2731Hz at 10cm: | $\geq 85\text{dB}$ |
| Resonant Frequency: | 2400Hz |
| Coil Resistance: | $47 \pm 5\Omega$ |
| Operating Temperature: | -20~ +70°C |
| Storage Temperature: | -30~ +85°C |
| Weight: | 2g |

Requires additional electronic circuitry to operate as a sounder

Features:

- ROHS Compliant
- Sealed base

All data at 25°C unless otherwise specified