


## Datasheet

### Double Level Snap On Earth Terminal

RS Stock number 872-4802

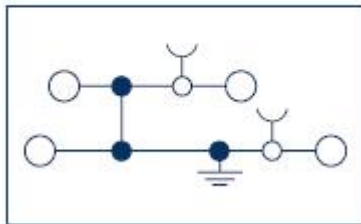

Protective earth terminal  
4 connections

## Specifications

Rated wire cross-section, mm<sup>2</sup> | AWG: 16 | 18-6

Rated impulse voltage, kV | Contamination degree: 8 | 3

Plug gauge acc. to EN 60 947-1 | Flamm. class acc. to UL 94: B7 | V 0

### Connection data

Single wire (solid) | stranded, mm<sup>2</sup>: 0.2-16 | 0.2-16

Finely-stranded | finely-stranded: 0.2-16 | 0.2-10

(w/ferrules DIN 46 228/1), mm<sup>2</sup>

Contact Wire Range, mm<sup>2</sup>: 0.6-16

Stripping length, mm: 10

Torque, Nm | Screw: 2.0-4.0 | Slotted M4