
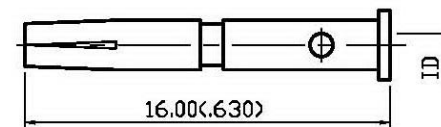


NO	DESCRIPTION	DATE
⚠	WORKING VOLTAGE	04.08.13'
	VOLTAGE RATING	
	DEL. PROOF VOLTAGE	
	ADD VSWR	

TYPE	ID
B	Ø1.100<0.43>

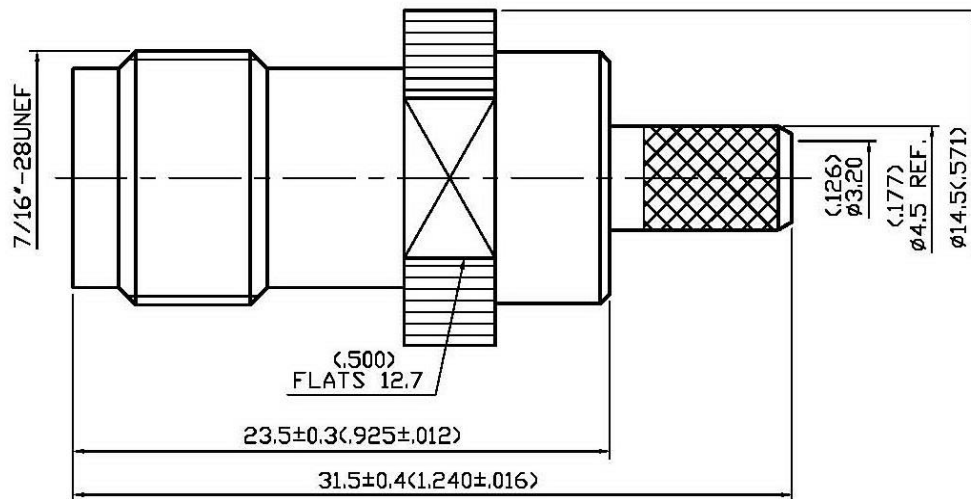

1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-11 GHz
- 1.2 NOMINAL IMPEDANCE: 50 OHM
- 1.3 VOLTAGE RATING: 500 VOLTS MAX. ⚠
- 1.4 VSWR: 1.5 MAX. @3 GHz ⚠

2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BRASS PER JIS-C3604
- 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710
- 2.4 CRIMP FERRULE: BRASS PER JIS-C2700

3.0 FINISHES AND OTHERS


- 3.1 SEE BELOW TABLE FOR DETAILS.

4.0 MECHANICAL


- 4.1 INTERFACE IN ACCORDANCE WITH: MIL-STD-348A
- 4.2 FOR USE WITH RG58U OR SIMILAR STYLE CABLE
- 4.3 CABLE ATTACHMENT: OUTER: CRIMP, INNER: SOLDER/CRIMP
- 4.4 CRIMP SIZE REQUIRED: CONTACT: 1.8<0.071> HEX. CRIMP TOOL
FERRULE: 5.5<0.216> HEX. CRIMP TOOL

5.0 ENVIRONMENTAL

- 5.1 OPERATING TEMPERATURE RANGE: -85° C TO +185° C



STRIPPING DIMENSION
SCALE 2:1

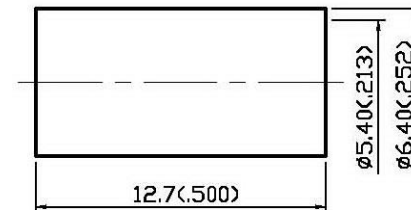

APPROVED

by _____ DATE: _____

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
5	CRIMP FERRULE	BRASS	1	NICKEL
4	INSULATION	TEFLON	1	NONE
3	CENTER CONTACT	BRASS	1	GOLD
2	CHASSIS	BRASS	1	NICKEL 100µ" MIN.
1	BODY	BRASS	1	NICKEL 100µ" MIN.



DESCRIPTION		TOLERANCE		品名		15-15-1 T.G.N 58U		DATE	版次	REV.
製圖	DRAWN Kristina	.X	±0.2	TITLE	\ROHS COMPLIANT		(50Ω)	09.19.92'	B-1	
檢圖	CHECK Arc	.XX	±0.1	單位	DWG.NO. 15-0074					
認定	APPROVAL Jenny	.XXX	±0.05	比例	SCALE					
		ANGLE	±5°		4:1					