
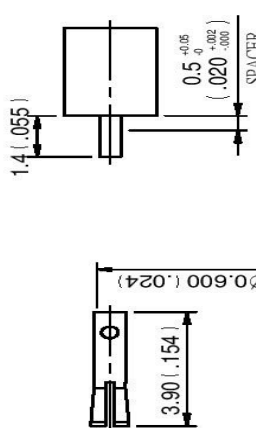
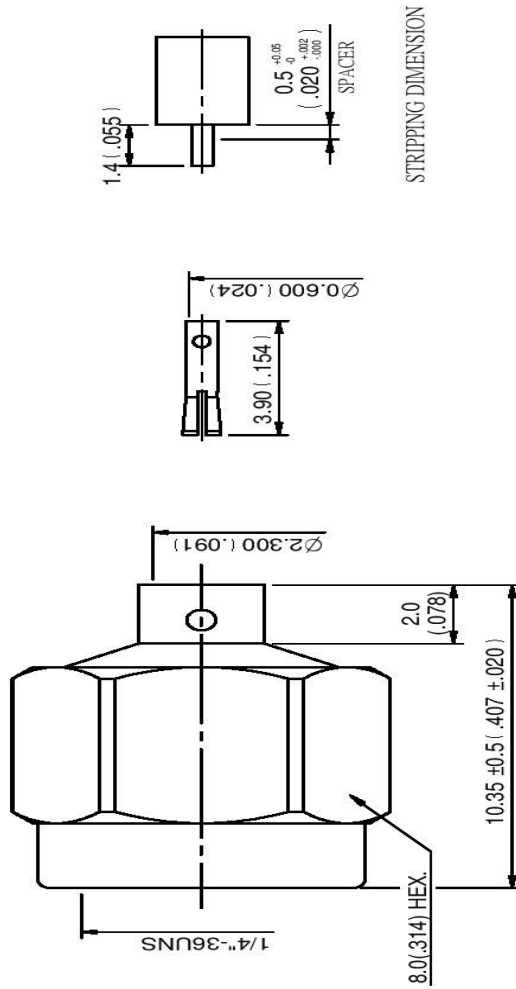


Datasheet
 Stock No:1706971

RS Pro ANTI-VIBRATION SMP STRAIGHT JACK SOLDER



STRIPPING DIMENSION

1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-18 GHz
- 1.2 NOMINAL IMPEDANCE: 50 OHMS
- 1.3 VOLTAGE RATING: 335 VOLTS MAX.
- 1.4 VSWR: 1.3 MAX.

2.0 MATERIALS

- 2.1 BODIES: BRASS PER IS-C564
- 2.2 CENTER CONTACT: BERYLLIUM COPPER PER ASTM B196 UNS C17300
- 2.3 INSULATION: TEFLON PER ASTM D457 AND ASTM D1710

3.0 FINISHES AND OTHERS

3.1 SEE BELOW TABLE FOR DETAILS

4.0 MECHANICAL

- 4.1 INTERFACE IN ACCORDANCE WITH: MIL-STD-248A
- 4.2 FOR USE WITH RG405 OR SIMILAR STYLE CABLE
- 4.3 CABLE ATTACHMENT: OUTER: SOLDER, INNER: SOLDER
- 4.4 RECOMMENDED COUPLING TORQUE: 3 TO 5 in.-lbs

5.0 ENVIRONMENTAL

5.1 OPERATING TEMPERATURE RANGE: -45 C TO +65 C

9	CENTER CONTACT	BERYLLIUM COPPER	1	GOLD 30 μ" MIN.
8	BODY	BRASS	1	GOLD 3 μ" MIN.
7	SHELL	BRASS	1	GOLD 3 μ" MIN.
6	WASHER	STAINLESS STEEL	1	GOLD 3 μ" MIN.
5	CHASSIS	BERYLLIUM COPPER	1	GOLD 3 μ" MIN.
4	GASKET	SILICONE	1	RED
3	ANTI - ROCK RING	BERYLLIUM COPPER	1	GOLD 3 μ" MIN.
2	EMI RING	BERYLLIUM COPPER	1	GOLD 3 μ" MIN.
1	INSULATION	TEFLON	1	NONE
NO	DESCRIPTION	MATERIAL	QTY	FINISH

APPROVED by _____ DATE: _____

DESCRIPTION	ANTI - VIBRATION SMP STRAIGHT JACK SOLDER			
DRAWN	品名	40480208220003	RG405	DATE
Jackie	TITLE	POHS COMPLIANT	(50Ω)	REV
CHECK	UNIT	DWG.NO.	48-030-Z	A-0
Arc	mm(m)			
APPROVAL	SCALE			
Jenny	ANGLE ± 5°	6:1		