


## Features

- Unique 36 pole strip
- Easily cut to required number of poles
- Can be supplied pre-cut to specified number of poles
- Dual horizontal or vertical mounting
- Moulded in grey UL94-V0 flame retardant PC
- Professional rising clamp terminals
- 0.2-2.5mm<sup>2</sup> (24-12AWG) solid & stranded cable
- Optional polarising clips
- Anti solder wicking
- Guided pin alignment
- Captive screws


## Specification

Rating	: 16A/250V UL=14A/300V, VDE&IMQ=16A/250V
Dielectric strength	: ≥2.5kV
Impulse withstand voltage	: 4kV
Working temperature	: 130°C
Moulding	: UL94-V0 flame retardant PA66
Pin/terminal	: Tinned, nickel plated brass
Rising Clamp	: Zinc plated steel
Screw/torque	: M2.5 steel zinc plated, 0.4Nm
Recommended PCB hole size	: ø1.3mm

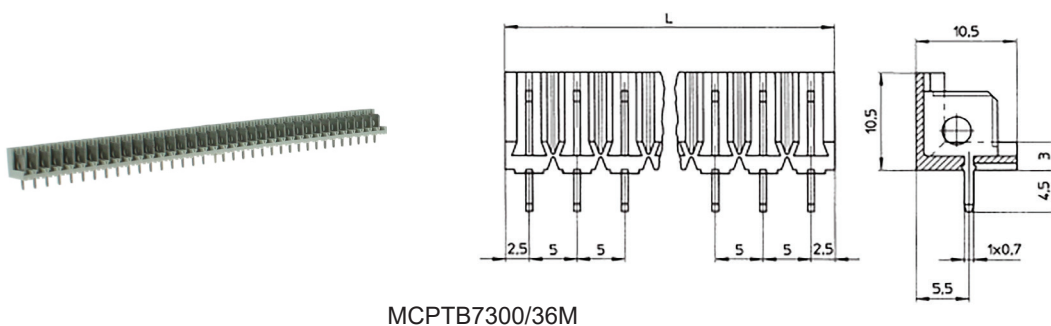





MCPTB9308/18 / MCPTB9308/6

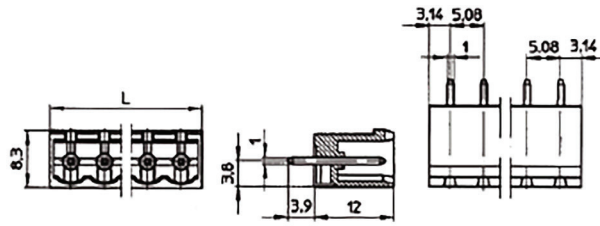

MCPTB9358/10AO

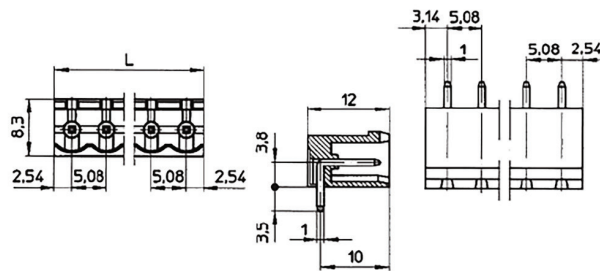

MCPTB93VE/4

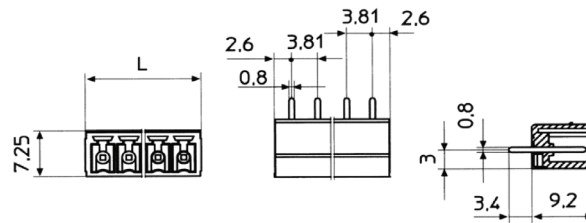

Dimensions : Millimetres

## Part Number Table

Description	Poles	Length	Part Number
Terminal Block Header, Vertical, 5mm Pitch Pluggable	36	180mm	MCPTB7300/36M
Terminal Block Header, vertical, 5.08mm Pitch Pluggable	18	92.6mm	MCPTB9308/18
	6	31.7mm	MCPTB9308/6
Terminal Block Header, Horizontal, 5.08mm Pitch Pluggable	10	50.8mm	MCPTB9358/10AO
Terminal Block Header, Vertical, 3.81mm Pitch Pluggable	4	16.6mm	MCPTB93VE/4

**Important Notice :** This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.