


Datasheet

# RS Pro Heat Shrinkable Ring Terminals 'HB' (Brazed Type)

Stock Number: 125-1970

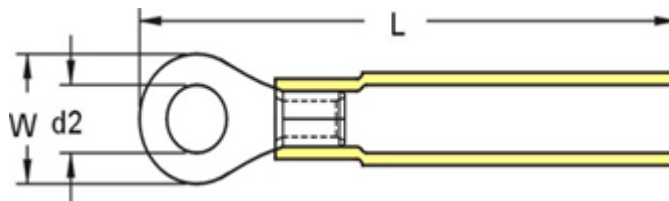

WIRE RANGE A.W.G. / mm <sup>2</sup>	ITEM NO.	STUD SIZE		DIMENSION inch(mm)		INSULATE D COLOR	Q'TY BOX
		#	d2	W	L		
12-10 A.W.G.	RHB5-5	#10	5.3	0.374	1.339	YELLOW	500
4-6 mm <sup>2</sup>				9.5	34		

### Maximum Electric Current:

A.W.G.	12	10	
AMP.	35	50	

**Maximum Electrical Rating:** 600 V Max

**Shrink Temperature:** 150°C

**Operating Temperature:** -10°C - +105°C

**Insulation Material:** High Density PE

**Terminal Material:** Copper