

Customization

01 series

03S series

03S 30-160

05S series

07S series

08 series

09C series

10 series

11 series

12 series

13 series

17 series

20 series

21 series

23 series

24 series

27series

28 series

30 series

35 series


43 series

F02 series

L01 series



PU

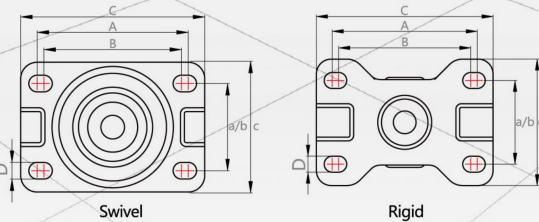

Standard	Result
T/ZSJL 001-2019	✓
T/ZSJL 002-2019	✓
T/ZSJL 003-2019	✓

* Remark: Please refer to the standard of Zhongshan caster industry association.

Wheel: Thermoplastic polyurethane (PU).
Wheel surface hardness: 98-100° Shore A.
Wheel core structure: polypropylene (PP).
Bearing: SUPO customization single ball bearing with plastic dust-proof cover.
 For more information please refer to page285.

Swivel Top Plate	Wheel Material	NO. Model	Wheel Dia (mm)	Tread Width (mm)	Load Capacity (kg)	Load Height (mm)	Swivel Radius (mm)	Brake Swivel Radius (mm)	Bearing	Plate size (mm)	Hole Spacing (mm)	Hole size (mm)
	(PU)	Z03S-01-75-221	75(3")	32	110	106	74.5	117		(C)95x67	(A)78x45 (B)71x45	(D)8.5
		Z03S-01D-75-221										
		Z03S-01C-75-221										
		Z03S-04-75-221										
		★ Z03S-01-100-221	100(4")	140	130	88	121					
		★ Z03S-01D-100-221										
		Z03S-01C-100-221										
		★ Z03S-04-100-221	125(5")	150	155	101.5	126					
		Z03S-01-125-221										
		Z03S-01D-125-221										
		Z03S-01C-125-221										
		Z03S-04-125-221										

★: Star product

Others (MOQ)

Top plate with total lock brake (Metal)	Swivel(Hollow Rivet)	Swivel(Hollow Rivet) with Total lock brake(Metal)	Swivel(Hollow Rivet) with Total lock brake(Plastic)	Swivel(Hollow Rivet) with side lock brake(Metal)
Z03S-01A-63-221	Z03S-03-63-221	Z03S-03A-63-221	Z03S-03D-63-221	Z03S-03C-63-221
Z03S-01A-75-221	Z03S-03-75-221	Z03S-03A-75-221	Z03S-03D-75-221	Z03S-03C-75-221
Z03S-01A-100-221	Z03S-03-100-221	Z03S-03A-100-221	Z03S-03D-100-221	Z03S-03C-100-221
Z03S-01A-125-221	Z03S-03-125-221	Z03S-03A-125-221	Z03S-03D-125-221	Z03S-03C-125-221

