


## FEATURES

- Miniature DC SSR mounted on Din EN adapter.
- 60VDC 4 Amp.
- Control voltage 4.25VDC – 32VDC
- Isolation input / output 4000 VACrms
- Operating Temp -20°C to 80°C (-4°F - 176°F)
- Blocking Voltage 60VDC
- Dropout Voltage 1 VDC
- Minimal Operational Load 1mA
- Surface mount technology
- Switching Frequency <100Hz
- Off state leakage current <0.01mADC
- Potting compound Flame retardant Silicone rubber.

## RS PRO DC switching SSR 60VDC 4Amps Control 4.25 - 32 DC with base

RS Stock No.: 2303312

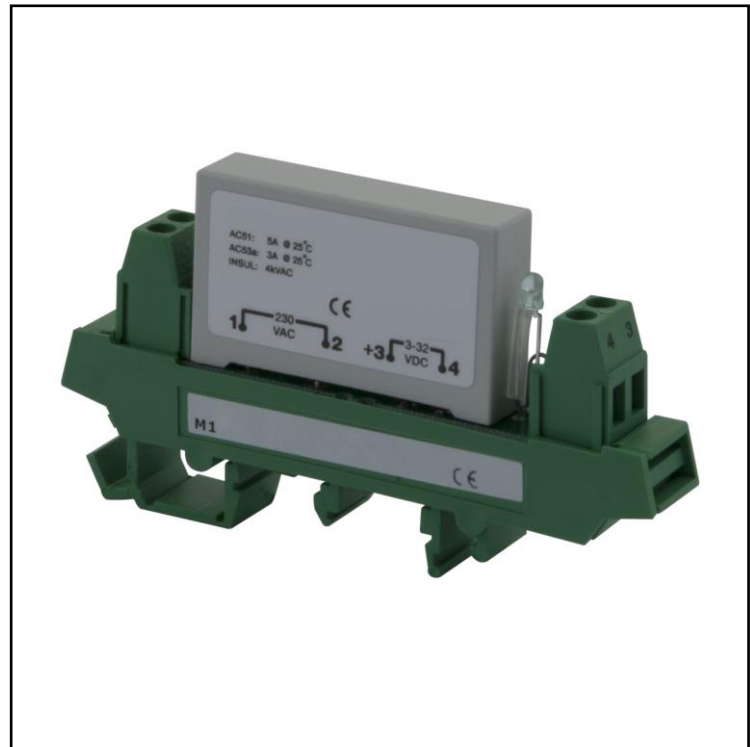

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

# Solid State Relays

## Product Description

- The DC switching relay is used in applications where there is a need for fast switching of small DC loads with a high input/output insulation of more than 4000VACrms. The DC switching relay always switches on and off in accordance with the applied control voltage
- Applications: - Heaters, Motors, Valves or Solenoids

## General Specifications

Miniature Din Rail mount SSR 4 Amp, 60v SSR mounted on Din EN Adapter

## Mechanical Specifications

SSR 43mm \* 25.4mm\*10.5mm

## Electrical Specifications

4 Amp, 60VDC

## Additional Information

<b>EAN</b>	5350035409350
<b>Custom Tariff Number</b>	85362010

## Approvals

<b>Declarations</b>	MFR Declaration of Conformity
---------------------	-------------------------------

# Solid State Relays



**Standards Met**

CE CRUus, EAC, LVD:EN60947-1, EMCD:EM60947-1 UL508, C22.2 No.14

