


NO	DESCRIPTION	DATE
①	MODIFY APPEARANCE OF ②	06.30.09'
③	ADD (P/N:5465137)	03.24.11'

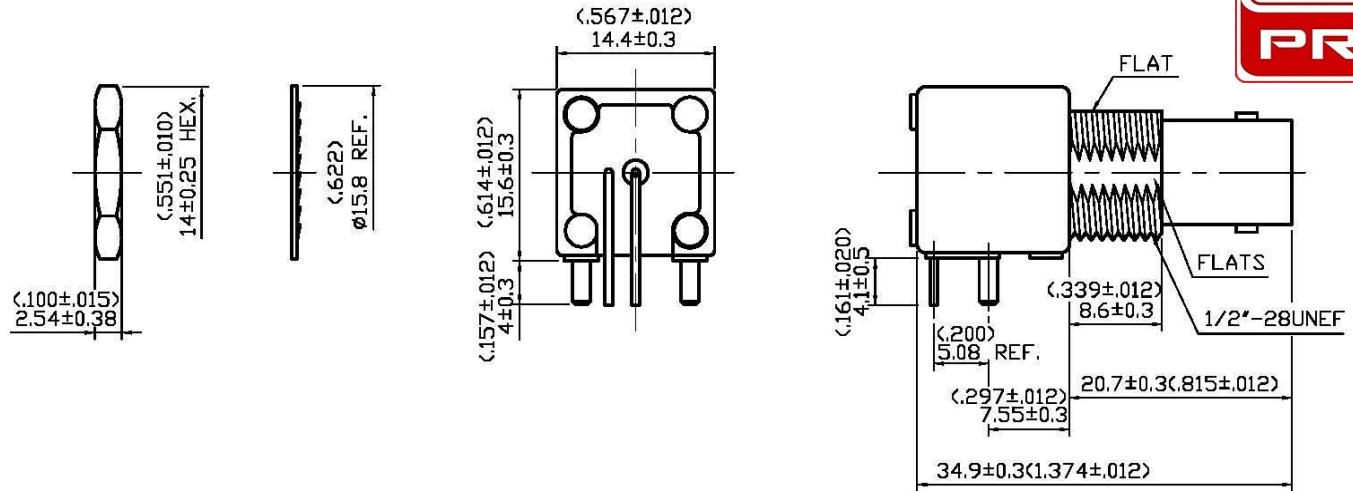

SPECIFICATIONS:

MECHANICAL CHARACTERISTICS:
MATING/UNMATING--500 CYCLES

ELECTRICAL CHARACTERISTICS:

NORMAL IMPEDANCE-- 50 OHMS

FREQUENCY RANGE-- 0-1 GHz

TESTING VOLTAGE-- 500 VOLTS RMS

DIELECTRIC WITHSTANDING VOLTAGE-- 1500 VOLTS RMS


INSULATION RESISTANCE-- 5000 MEGOHMS MIN.

ENVIRONMENTAL CHARACTERISTICS:


TEMPERATURE RANGE-- -40° C TO +60° C

THERMAL SHOCK-- MIL-STD-202,METHOD 107,COND.B.

PHYSICAL SHOCK-- MIL-STD-202,METHOD 204,COND.B.



MOUNTING HOLE



RECOMMENDED PCB LAYOUT

(P/N:5465137) ③

APPROVED

by _____ DATE: _____

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
7	SOLDER PIN	COPPER WIRE	1	TIN
6	CENTER CONTACT	PHOSPHOROUS BRONZE WITH GOLD PLATING AT CONTACT AREA TIN PLATING AT TAIL	1	GOLD TIN
5	INSULATION	POLYPROPYLENE UL 94HB	1	NONE
4	LOCK WASHER	S50C	1	NICKEL
3	NUT	BRASS	1	NICKEL
2	BODY	ZINC ALLOY	1	NICKEL
1	MOUNTING POST	BRASS	2	TIN

DESCRIPTION		BNC RIGHT ANGLE PCB MOUNT JACK REEPTACLE(METAL HOUSING)							
製圖	DRAWN	TOLERANCE	品名	13-60-3	D.G.Z	日期	DATE	版次	REV.
	Yoko	X ±0.2	TITLE	\ROHS COMPLIANT (50Ω)		08.05.94'		B-2	
檢圖	CHECK	XX ±0.1	單位	mm(in)	DWG.NO.	13-0271			
	Arc	XXX ±0.05	比例	SCALE	5465137				
認定	Jenny	ANGLE ±5°							