



RoHS
Compliant

Features

- Ideal for Automated Placement
- Low profile space
- Glass Passivated Chip Junctions
- Low reverse leakage current
- High current capability
- Low forward voltage drop

Mechanical Data

- Case: JEDEC SOD-123FL Molded plastic
- Polarity: Colour band denotes cathode
- Mounting position: Any

Applications

- For use in SMPS, high frequency inverters, PWM and polarity protection applications

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristics	Symbol	ES1DL	ES1GL	Unit
	Marking	E1DL	E1GL	
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	200	400	V
Maximum RMS Voltage	V_{RMS}	140	280	
Maximum DC Blocking voltage	V_{DC}	200	400	
Maximum Average Forward Rectified Current @ $T_A=55^{\circ}C$	$I_{(AV)}$	1		A
Peak Forward Surge Current, 8.3mS Single Half Sine-Wave, Superimposed on Rated Load (JEDEC Method)	I_{FSM}	25		
Peak Forward Voltage at 1.0A DC (Note1)	V_F	0.95	1.25	V
Maximum DC Reverse Current @ $T_J=25^{\circ}C$ at Rated DC Blocking Voltage @ $T_J=100^{\circ}C$	I_R	5		μA
		150		
Maximum Reverse recovery time @ $I_F=0.5A, I_R=1.0A, I_{rr}=0.25A$	t_{rr}	35		nS
Typical Thermal Resistance Junction to Ambient	$R_{\theta JA}$	150		$^{\circ}C/W$
Operating Junction Temperature Range	T_J	-55 to +150		$^{\circ}C$
Storage Temperature Range	T_{STG}	-55 to +150		

NOTE: 1. Mounted on FR-4 P.C.B. With 0.9x1.5 mm copper pad areas ($\approx 35 \mu m$ thick)
2. The typical data above is for reference only.

Rating and Characteristic Curves

Fig. 1 - Forward Current Derating Curve

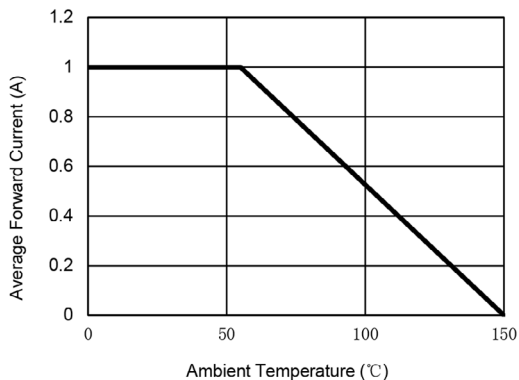


Fig. 2 - Maximum Non-Replicative Surge Current

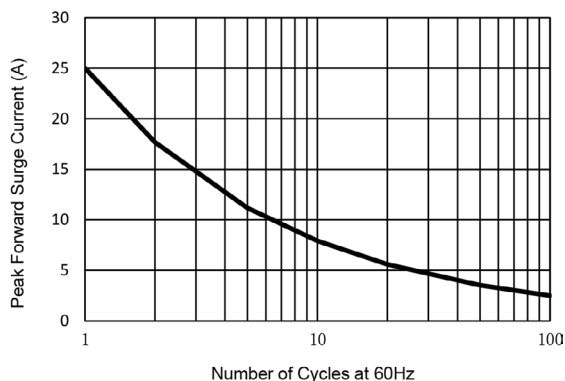


Fig. 3 - Typical Reverse Characteristics

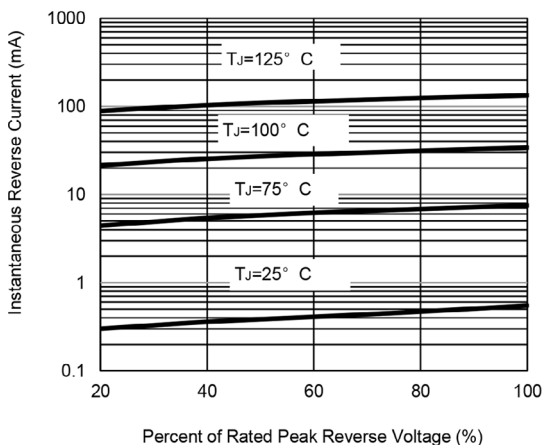


Fig. 4 - Typical Forward Characteristics



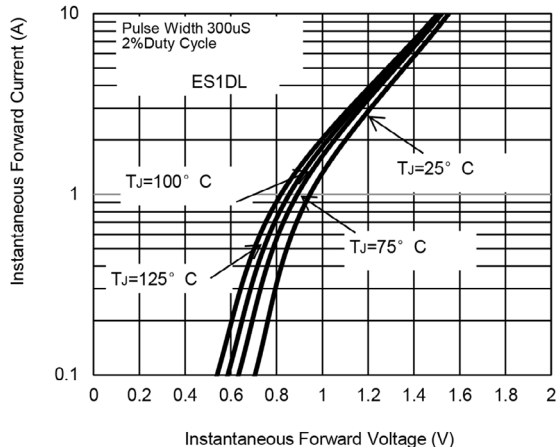


Fig. 5 - Typical Forward Characteristics

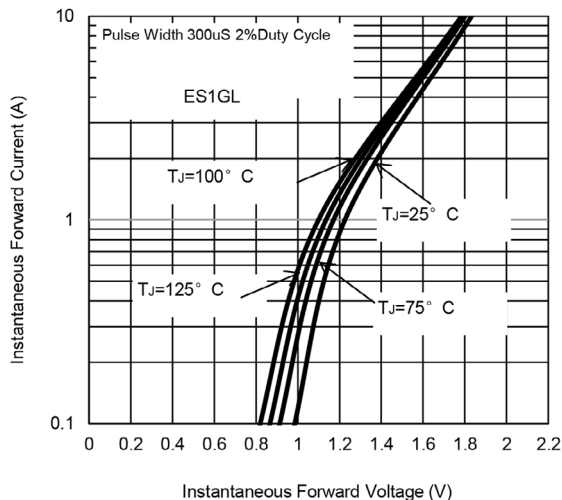

Packaging Dimensions

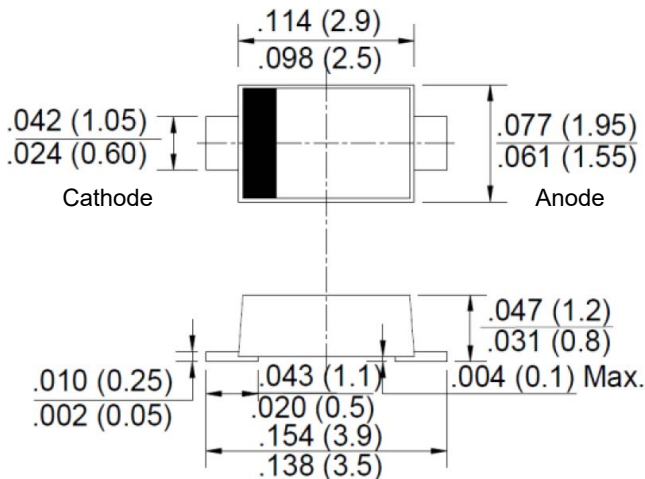

SOD-123FL

Dimensions : Inches (Millimetres)

Part Number Table

Description	Part Number
Rectifier Diode, Super Fast, 1A, 200V, 35ns, SOD-123FL	ES1DL
Rectifier Diode, Super Fast, 1A, 400V, 35ns, SOD-123FL	ES1GL

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
 Farnell.com/multicomp-pro
 sg.element14.com/b/multicomp-pro