


Datasheet

RS PRO DIN JACK SCREW LOCK

Stock No: 2100239 , 2100246 , 2100240 , 2100243 , 2100242

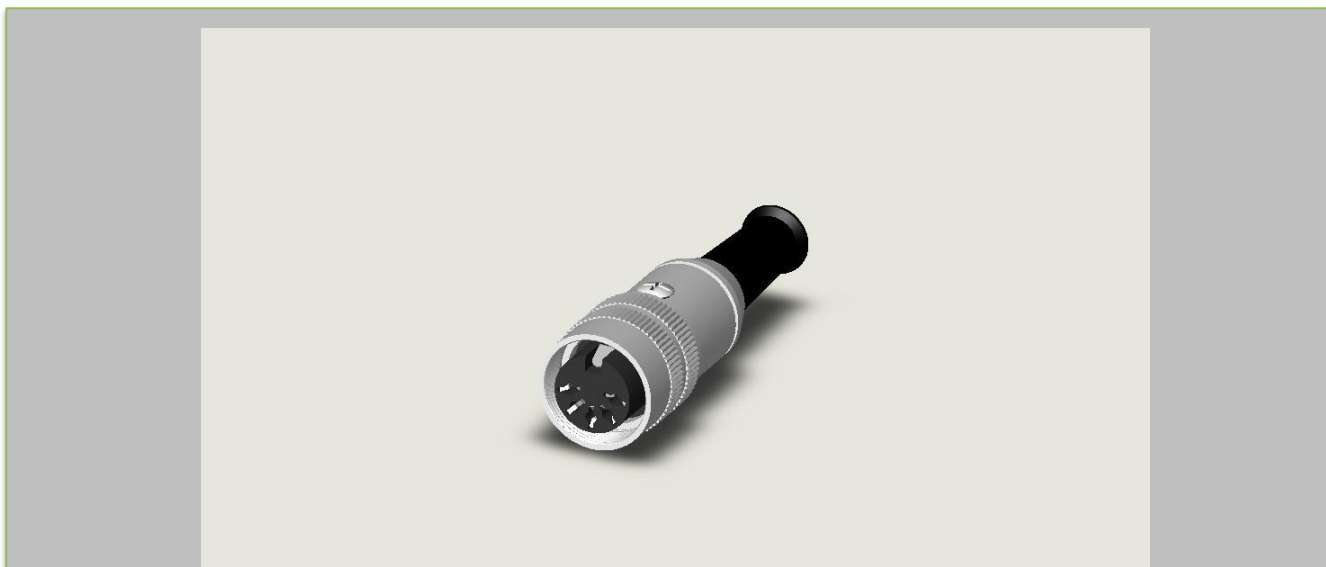


Technical Specifications:

To include attributes e.g. height, width, depth, color etc.

Connector type:	Jack
Mounting type:	Cable
Female	IP40
Contact Gender:	Female
Number of Contact:	3~8

Dimensional line drawings

See examples on Brandzone

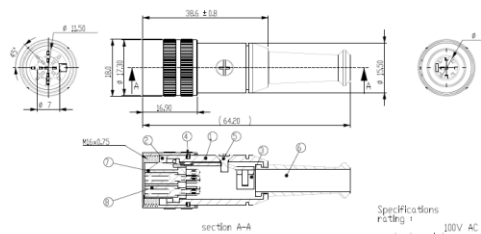

Specifications
 Rating: 100V AC 4A MAX
 contact resistance: 1 mΩ-50mΩ MAX; shell-50mΩ MAX
 insulation resistance: 1 MΩ 100 MEGΩ 500V DC
 voltage withstand: 250V AC RMS, For 1 minute

No.	Terminology	Material	Plating	Quantity
1	Terminal	Brass	Silver P&A	1
2	Housing	ABS		1
3	Set Screw	Steel	Nickel P&A	1
4	Spring	Steel	Nickel P&A	1
5	Lock Holder	Steel	Nickel P&A	1
6	Screw Cap	Brass	Nickel P&A	1
7	Shell Cover	Brass	Nickel P&A	1

TABLE A					
E-20288	E-20289	E-20290	E-20291	E-20292	E-20293

 RoHS Compliant	 REACH Compliant	EN CABLE JACK SURE LOCKING	 UL 94V-0	 UL 94V-0	 UL 94V-0	 UL 94V-0	 UL 94V-0	 UL 94V-0	 UL 94V-0	 UL 94V-0	 UL 94V-0
-----------------------	------------------------	-------------------------------	-----------------	-----------------	-----------------	-----------------	-----------------	-----------------	-----------------	-----------------	-----------------