


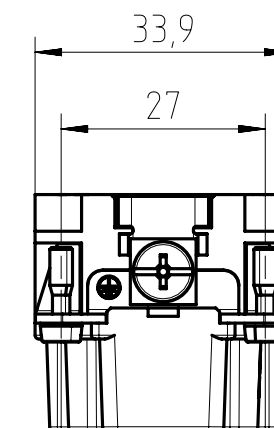
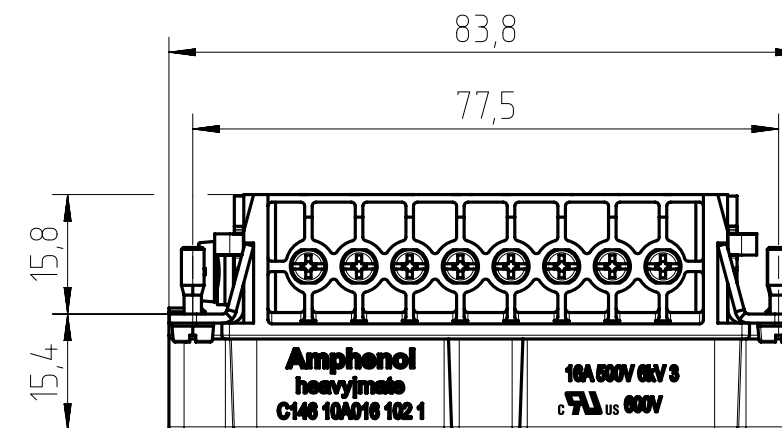


Copying of this document and giving it to others and the use
 or communication of the contents thereof, are forbidden with-
 out express authority. Offenders are liable to the payment of
 damages. All rights are reserved in the event of the grant of
 a patent or the registration of the utility model or design.
 Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung
 und Mitteilung ihres Inhalts nicht gestattet, soweit nicht
 ausdrücklich zugestanden. Zuwiderhandlungen verpflichten
 zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung
 oder Gebrauchsmuster-Eintragung vorbehalten.

General Characteristics	Standard	Value
number of contacts		16 + PE
termination technique		screw with wire protection
wire gauge		0,5 mm ² - 2,5 mm ² AWG 20 - AWG 14
max. insulation diameter		4,6 mm
stripping length		5,5 +0,5 mm
tightening torque		0,5 Nm
flammability	UL 94	V-0
Electrical Characteristics	Standard	Value
rated voltage	IEC 60664-1	500 V (UL/CSA 600 V)
pollution degree	IEC 60664-1	3
installation (overvoltage) category	IEC 60664-1	3
material group	IEC 60664-1	3a
rated impulse withstand voltage	IEC 60664-1	6 kV
rated current T _{amb} = 40 °C		16 A
current carrying capacity	IEC 60512-5-2	see derating curve
contact resistance	IEC 60512-2-1	≤ 5 mΩ
insulation resistance	IEC 60512-3-1	≥ 10 ¹⁰ Ω
Climatical Characteristics	Standard	Value
climatic category	IEC 60068-1	40 / 125 / 21
upper temperature	IEC 60512-11-9	+125 °C
lower temperature	IEC 60512-11-10	-40 °C
Mechanical Characteristics	Standard	Value
mechanical operation	IEC 60512-9-1	≥500 mating cycles
Materials	Standard	Value
insert		PC
contacts		CuZn (brass)
contact plating		Ag (silver)
color		grey

Alle technischen Daten wurden unter Laborbedingungen ermittelt und können im Praxisbetrieb abweichen.
 Es handelt sich bei den Angaben weder um Beschaffenheits- noch um Haltbarkeitsgarantien.
 All technical data have been measured in a laboratory environment and can be different during
 practical usage of the product. Any product information is for descriptive usage only and not legally binding;
 particularly the information does not constitute or provide any legal guarantees ("Beschaffenheitsgarantie" or
 "Haltbarkeitsgarantie").

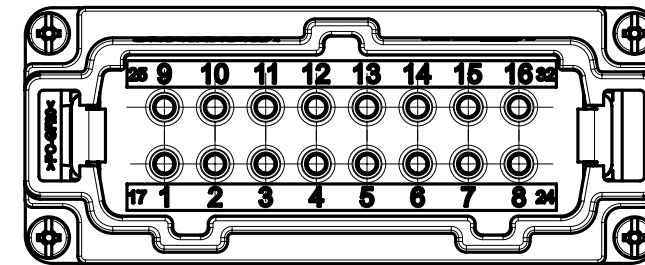

Gewicht (errechnet) / Calc WT: 87,4 g				Zul. Abw./Tolerances: ISO 2768-m		 DIN / ISO 13715		Maßstab / Scale: 1:1 (1:2)		A3				
Prüfmaß / Testdimension														
Teileindex / Partindexnumber:														
Bagatelle change:								CUSTOMER DRAWING						
				Gez. Drawn	29.05.2015 DSC-MIG		Stifteinsatz 16-Pol + PE pin insert 16 pole + PE							
				Status	Released									
09	201800292	16.07.2018	PWÖLF	Gepr. Checked	08.08.2018 MGRIMM									
08	201600668	12.05.2017	IMBERT											
07	201600668	15.12.2016	IMOHR	Amphenol Tuchel Industrial GmbH			M C146 10A016 102 1						Blatt/Sheet 1	
06	201600249	21.04.2016	PWÖLF											
05	201500909	04.03.2016	JHÖNN										1 Bl.	
Index	Änderung/Description		Datum/Date	Name	Ers. f. / Replacement for: M-C146 10A016 102 1 Rev04									