




Benefits

- Modern & minimalist design
- Luminous & cosy
- Adjustable colour for 3000K/4000K/6500K
- Long lifetime up to 35,000 hours

Application

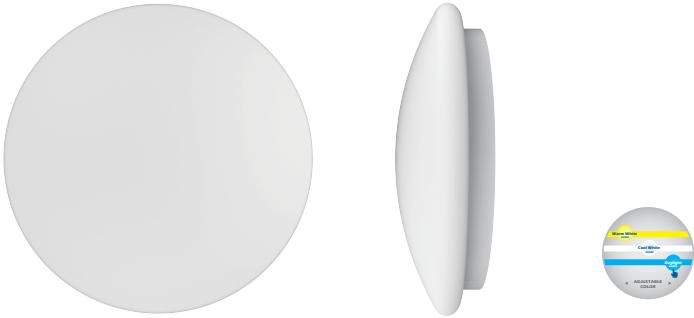

Model	Item Description	W	PF	lm	lm/W	CRI	Beam Angle	Life (hrs)	Single Box (LxWxH)mm	Outer Box (LxWxH)mm	Packing Qty (PCS/CTN)
MXL1055-HC390-24W	RENZO II HC390 24W ACT	24	0.7	2040	85	80	120°	35000	415*90*415	850*385*430	8

ACT = Adjustable Color Temperature (3000K | 4000K | 6500K)

Technical Specifications	
CRI	80
Colour Consistency (SDCM)	≤ 6
Dimmable	No
Housing Colour	White
IP	IP20
IK	IK02
Driver integrated (Yes/No)	Yes

Electrical Supply	
Frequency (Hz)	50/60Hz
Voltage (V)	220V-240V
AC/DC	AC

Mechanical Properties	
Optical Material	PP
Housing Material	PC

Application Conditions	
Operating Temperature	-20°C~40°C
Application Temperature	25°C
Storage Environment	-25°C~50°C

Dimensional Drawing

