



Main

| | |
|-----------------------------|---|
| Range of product | Easy Modicon ABL2 |
| Product or component type | Power supply |
| Power supply type | Regulated switch mode |
| Rated power in W | 351 W |
| Main Input Voltage | 100...120 V AC single phase 200...240 V |
| Output voltage | 24 V DC |
| Power supply output current | 14.6 A |
| Operating position | Any position |
| Vibration resistance | 4 gn (f= 10...500 Hz) conforming to EN/IEC 61131-2 |
| Name of test | Electromagnetic hypersensitivity (EHS) conforming to EN 61000-6-2 level A |

Complementary

| | |
|---------------------------------|--|
| Input voltage limits | 90...132 V 180...264 V |
| Network frequency | 47...63 Hz |
| Inrush current | 60 A at 100...120 V AC 60 A at 200...240 V AC |
| Cos phi | 0.5 |
| Efficiency | 87 % |
| Power dissipation in W | 52.4 W |
| Current consumption | 3.3 A at 240 V |
| Input protection type | Integrated fuse (not interchangeable) |
| Output voltage limits | 20.4...27.6 V |
| Line and load regulation | +/- 1 % |
| Holding time | >= 12 ms at 115 V |
| Output protection type | Against overload, protection technology: 1.1...1.5 x In Against short-circuits, protection technology: 1.1...1.5 x In Against overvoltage, protection technology: 28.8...33.6 V Thermal |
| Connections - terminals | For ground connection: screw type terminals, connection capacity: 1 x 4 mm ² AWG 12 |
| Marking | CE |
| Electromagnetic compatibility | Immunity to electromagnetic interference conforming to EN 55022 class B |
| Mounting support | DIN rail with accessory DIN rail with accessory |
| Operating altitude | 5000 m |
| Output coupling | Series |
| Overvoltage category | II |
| Meantime between failure [MTBF] | 600000 h at 25 °C |
| Status LED | 1 LED (green) output voltage |
| Width | 215 mm |
| Height | 115 mm |
| Depth | 30 mm |
| Product weight | 0.79 kg |

Environment

| | |
|---------------------------------------|---|
| Product certifications | EAC IC RoHS KC RCM |
| IP degree of protection | IP20 conforming to IEC 62368-1 |
| Ambient air temperature for operation | -30...70 °C (with power derating of 2.5 % per °C) |
| Ambient air temperature for storage | -40...85 °C |
| Relative humidity | 10...95 % |
| Overvoltage category | Class I conforming to IEC 62368-1 |
| Pollution degree | 2 |
| Dielectric strength | 2000 V between input and ground |

Packing Units


| | |
|------------------------------|------------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 3.600 cm |
| Package 1 Width | 12.500 cm |
| Package 1 Length | 22.300 cm |
| Package 1 Weight | 875.000 g |
| Unit Type of Package 2 | S03 |
| Number of Units in Package 2 | 16 |
| Package 2 Height | 30.000 cm |
| Package 2 Width | 30.000 cm |
| Package 2 Length | 40.000 cm |
| Package 2 Weight | 14.420 kg |
| Unit Type of Package 3 | P06 |
| Number of Units in Package 3 | 128 |
| Package 3 Height | 75.000 cm |
| Package 3 Width | 80.000 cm |
| Package 3 Length | 60.000 cm |
| Package 3 Weight | 123.360 kg |

Offer Sustainability

| | |
|----------------------------|--|
| REACH Regulation | REACH Declaration |
| REACH free of SVHC | Yes |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Mercury free | Yes |
| China RoHS Regulation | China RoHS Declaration |
| RoHS exemption information | Yes |


Dimensions Drawings

Mechanical Dimensions

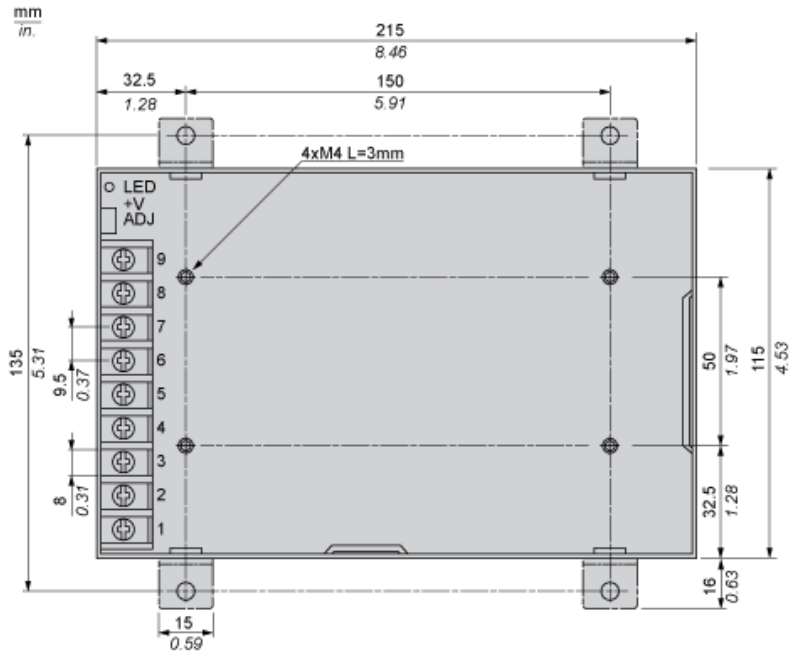

Mounting and Clearance


Vertical Mounting

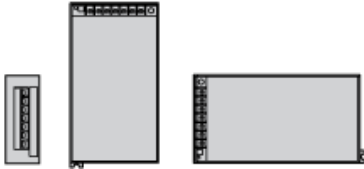

Horizontal Mounting




Clearance

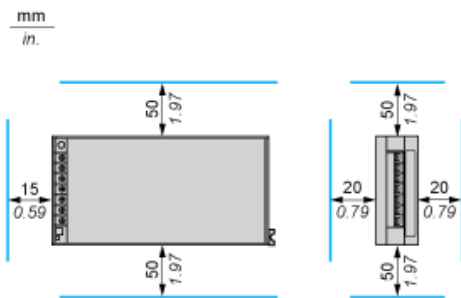


Performance Curves

Static Characteristics

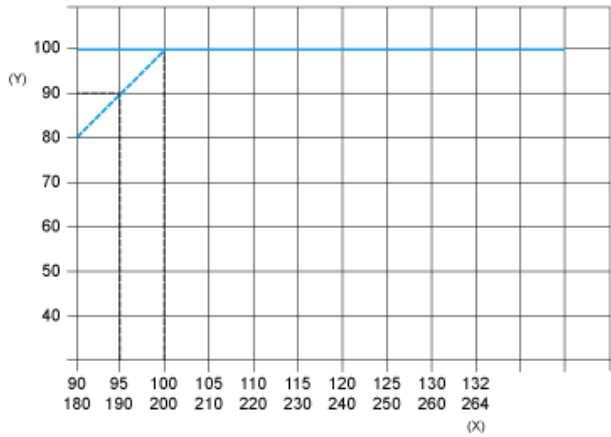

- (1) 180 - 264 VAC
- (2) 90 - 132 VAC
- (y) Load %
- (x) Input voltage (VAC) 50/60 Hz

Derating Curve

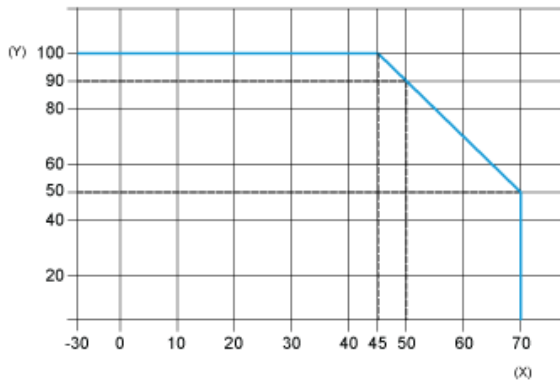

- (y) Load %
- (x) Ambient temperature (°C)