

Datasheet

RS PRO UL11028 Black, 3.3 mm² Hook Up Wire, 30.5m

Stock No: 6877639



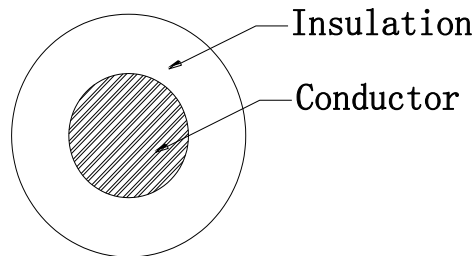
Technical Specifications:



| | |
|---------------------------------|---------------|
| Conductor | Tinned Copper |
| Cores Number | 1C |
| Size(AWG) | 12AWG |
| Construction(± 0.008 mm) | 65/0.25 |
| Stranded Dia.(mm) | 2.36 |
| Insulation Material | MPPE |
| Insulation Color | Black |
| Ave Thickness(mm) | 0.30 |
| Min Thickness(mm) | 0.22 |
| Insulation Dia.(± 0.10 mm) | 2.97 |

Features & Benefits:

- **Temperature Range: -40 to 105 °C**
- **Conductor resistance(20°C Ω/km): 5.74Max.**
- **Rated Voltage: 600V**

Cross Section drawings



Cable Marking: E254881  AWM STYLE 11028 12AWG
105°C 600V VW-1 c  AWM I A 105°C 600V FT1 -LF- -
HF- ELETECK

Applications: Hook up wire is frequently used in control panels, automotive, meters, ovens, internal wiring of computers, electronic equipment, business machines and appliances.