



Datasheet

RS PRO Fixed Receptacle Female Solder Brass



RS Pro's range of Chrome plated Brass push-pull locking connectors offer exceptional quality that is found in many cutting-edge connectors, including full 360° EMC shielding and high mating life. As has become standard within the RS Pro brand you can expect high quality products but at a reasonable price. These connectors are ideal for use in medical devices, testing equipment, audio equipment and other high-end indoor applications.

Features & Benefits:

- **Push-pull latching system**
- **Chrome plated Brass**
- **IP50**
- 360° Screening for full EMC shielding

Pin Number	Current Rating	
2	25A	
3	17A	
4	15A	
5	14A	
6	12A	
7	11A	
8	10A	
10	8A	
12	7A	
14	6.5A	
16	6A	
18	5.5A	
19	5A	

Quality Standards









Technical

Characteristics	Value	Standard
Endurance	>5000cycles	IEC60512-5test9a
Humidity	Up to 95% at 60°C	
Temperature range	-55°C, +250°C	
Resistance to vibration	10-2000Hz,15g	IEC 60512-4 test 6d
Shock resistance	100g, 6ms	IEC 60512-4 test 6c
Salt spray corrosion test	>96hrs	IEC 60512-6 test 11f
Protection index (mated)	IP50	IEC 60529
Climatical category	55/175/21	IEC 60068-1


Electrical

Charac	teristics	Value	Standard
Shielding	at 10MHZ	>75 dB	IEC 60619-1-3
efficiency	at 1GHZ	>40 dB	IEC 60619-1-3





Dimensional line drawings

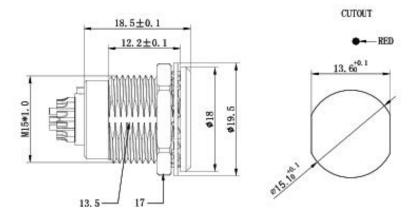

CONNECTOR SOLDER CUP VIEW































