



Datasheet RS PRO 4 WAY, 2 ROW, STRAIGHT, SPRING LOADED MALE, .100" [2.54mm] PITCH, PCB

Stock No: 2272158, 2272159



Product Details:

RS PRO Pogo Pins and Connectors (spring loaded terminals) consist of a pin, barrel, and steel spring with or without an insulator carrier. They are used in many industries across a wide range of applications to make a secure, high reliability connection. This series is highly customizable to meet specific stroke lengths, heights, and electrical capabilities. High-temp plastics are used for our insulators and unlimited molding designs allow for many different shapes and styles to be created for specific applications.

Features & Benefits:


- High reliability, corrects connection between uneven surfaces and satisfies high vibration connection requirements.
- Increased durability for heavy duty applications Highly Customizable-
- Size, stroke, shape, pin count, etc.
- Low Cost and Easily Integrated

rspro.com

Material:

Insulator: PA46, rated UL 94V-0, Color: Black Contacts: Copper Alloy Spring: Stainless Steel Plating: Gold flash over Nickel underplate overall **Electrical:** Voltage rating: 12 Volts Current rating: 1A max (3.30mm), 3A max (4.30&5.30mm) Contact resistance @ working stroke: 20 mohms max. before test 60 mohms max. after test Insulation resistance: 100 Mohms min Dielectric withstanding voltage: 100 VRMS @ 60HZ Mechanical: Spring force: 90±20gf @ 1.0mm working stroke (3.30mm) 70±20gf @ 1.0mm working stroke (4.30 & 5.30mm) Full stroke: 1.40mm Life test: 10,000 Cycles Min **Temperature Rating:** Operating temperature: -30°C to +85°C **Environmental:** Lead free, RoHS compliant.

Dimensional line drawings

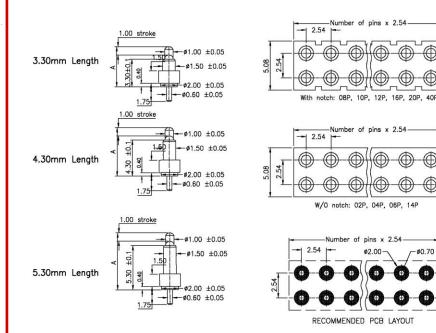

3.30mm Length Example: PH2-3B-08-MVP-3345 = 2X4 PIN

ADAM P/N	Initial Height
PH2-3B-XX-MVP-3345	4.5mm
PH2-3B-XX-MVP-3350	5.0mm

4.30mm Length

Example:	PH2-3B-08-MVP-4355	=	2X4	PIN	
----------	--------------------	---	-----	-----	--

ADAM P/N	Initial Height
PH2-3B-XX-MVP-4355	5.5mm
PH2-3B-XX-MVP-4360	6.0mm

5.30mm Length Example: PH2-3B-08-MVP-5365 = 2X4 PIN

ADAM P/N	Initial Height
PH2-3B-XX-MVP-5365	6.5mm
PH2-3B-XX-MVP-5370	7.0mm
PH2-3B-XX-MVP-5375	7.5mm
PH2-3B-XX-MVP-5380	8.0mm





Ø0.70





rspro.com