



ENGLISH


Stainless Steel Male/Male Cylindrical Bobbins

Cylindrical Bobbin mounts are simple and cost-effective vibration isolators that can be used in either compression and/or shear.

Applications:

- Static generator engines
- Compressors
- Motors

H = Height
D = Diameter
G = Tread
L = Stud Length

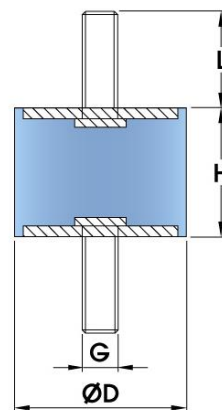

Item Code	Description	D (mm)	H (mm)	G x L (mm)	Max Compression Load (kg)	Max Shear Load (kg)
1854477	Male/Male 55 ShA Stainless Steel (316 grade)	15	15	M4x15	10.64	4.16
1854481	Male/Male 55 ShA Stainless Steel (316 grade)	25	30	M8x20	28.48	11.52
1854486	Male/Male 55 ShA Stainless Steel (316 grade)	30	30	M8x20	42.32	16.64

1854487	Male/Male 55 ShA Stainless Steel (316 grade)	40	20	M10x25	98.08	29.52
1854492	Male/Male 55 ShA Stainless Steel (316 grade)	50	35	M10x25	127.84	45.6
1854494	Male/Male 55 ShA Stainless Steel (316 grade)	50	50	M10x30	116.8	46.16
1854496	Male/ 55 ShA Stainless Steel (316 grade)	50	25	M10x25	152	46.16