

# USB Cable Type A Plug to Type C Plug


**multicomp** PRO



## Specifications

Connector to Connector : Type A Plug to Type C Plug  
 Contact Resistance : 2Ω Max.  
 Insulation Resistance : 10MΩ Min.  
 USB Standard : USB 2.0  
 Hi-Pot : 300V DC/10ms  
 Cable Length : 3ft  
 Jacket Colour : Black

## Diagram

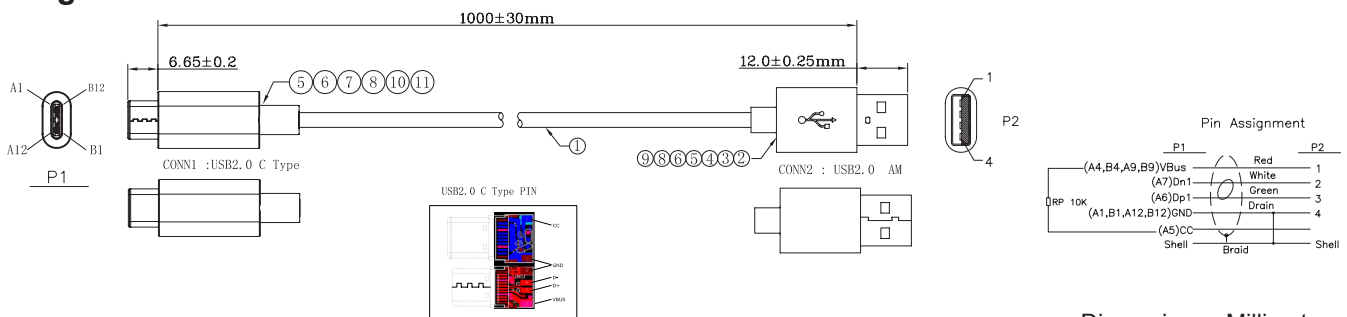

Dimensions : Millimetres

No.	Description	Qty.	Unit
1	No UL 28AWG (11/0.10TC)×2C+20AWG (26/0.16TC + 250D)×1C+E (26/0.16+250D)+AB(16/8/0.08TC 95%TC) OD:3.5mm Black No Mark	1.0	M
2	USB 2.0 AM White Insulation Solder Type, G/F plated terminal	1	Pcs
3	USB 2.0 AM Back Shell Nickel Plated Shell (OD: 3.5mm ~ 4.5mm)	1	Pcs
4	USB 2.0 AM Front Shell Nickel Plated Shell (L=26.14mm)	1	Pcs
5	USB 2.0 C Type Black Insulation Nickel plated shell with PCBA (Resistance 10kΩ)	1	Pcs
6	45P PVC Colour: Black	6	g
7	Transparent PE	16	g
8	H.S Tube, Colour: Black Ø:1 L=16mm×1Pc	0.016	M
9	Copper Foil: W=5mm 25μ	0.012	M
10	USB Type C~n Front Nickel Plated Shell	1	Pcs
11	USB Type C~n Back Nickel plated Shell	1	Pcs

## Part Number Table

Description	Part Number
USB 2.0, Type A Plug to Type C Plug, 3ft, Black	83-16851

**Important Notice :** This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro  
 Farnell.com/multicomp-pro  
 Element14.com/multicomp-pro

**multicomp** PRO