


FEATURES

- Non-fused terminal block
- Lightweight body
- Easy wiring installation
- Recessed housing for safety
- Brass contacts

RS PRO, 12 Way, 14 AWG, PP Non-Fused Terminal Block, 400V

RS Stock No.: 703-3814

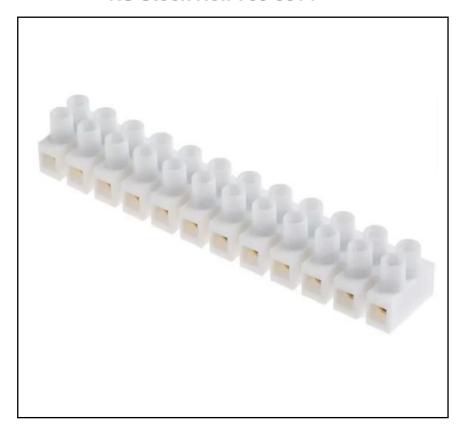

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.



Product Description

From RS PRO, this non-fused terminal block presents a reliable and cost-effective solution to wire-to-wire connections. This polypropylene terminal block has the advantages of being lightweight and rigid, with resistance to corrosion and high tensile strength. It also features raised screw down terminals for ease of wiring.

General Specifications

Fused	No
Contact Material	Brass
Termination Method	Screw Down
Colour	White
Material	PP
Number of Ways	12
Inserts	Brass
Housing	Polypropylene (PP)
Screws	Galvanised Steel
Applications	Connecting lighting to switches, Connecting wiring to a ground, HVAC Systems, Power Supplies

Electrical Specifications

Current Rating	6A
Voltage Rating	400V

Mechanical Specifications

Cable CSA	2.5mm²
Wire Size	14 AWG
Pitch	8mm



Operation Environment Specifications

Minimum Operating Temperature	-40°C
Maximum Operating Temperature	+85°C

Approvals

Standards Met	CE (BS EN 60998)
	,

