


FEATURES

- Rugged design with 316 stainless steel probe sheath
- Welded, grounded junction for fast response times
- Durable glass fibre insulated cable with stainless steel over braid
- Probe temperature range of -60 to 350°C

RS PRO Type K Thermocouple 40mm Length, 4mm Diameter → +350°C

RS Stock No.: 872-2534

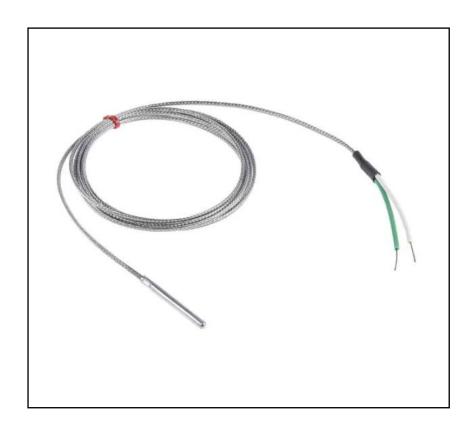

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Thermocouples



Product Description

From RS Pro a range of type K and Type J thermocouple probes with a rugged construction that conform to IEC 584 standards. These thermocouple temperature probes have a 316 stainless steel probe sheath and a glass fibre insulated lead with a stainless steel over braid. A grounded hot junction means these thermocouples have a fast response time.

General Specifications

Thermocouple Type	Type K
Temperature Measurement Range	-60°C to 350°C
Construction	316 stainless steel tube
Measuring Junction	Grounded
Application	General purpose. High temperature Oxidizing environment, thermocouple probes include heat exchangers, power stations, brick and cement kilns, heat treatment and annealing furnaces, thermostats, food thermometers, vehicle diagnostics and in laboratories


Mechanical Specifications

Probe Diameter	4mm
Probe Length	40mm
Probe Body Material	Stainless Steel
Insulation / Sheath Material	Glass Fibre
Termination Type	Cable
Compensating Cable Length	2m
Cable Insulation	Durable glass fibre insulation

Approvals

Compliance/Certifications	IEC 584
Standards Met	IEC



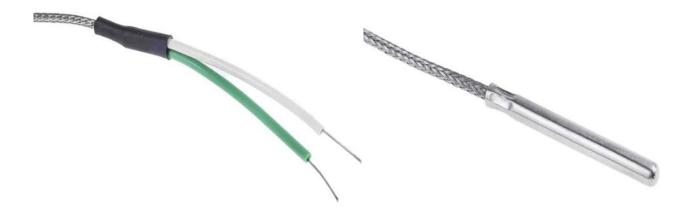

T/C Type	Conductors	Length	Termination	+Positi		-Negativ tail wire		Allied Code		RS order Code
'K'	1/0.2mm	1 metre	Mini plug	Green		White		70643600		363-0250
'K'	1/0.2mm	2 metre	Mini plug	Green		White				110-4482
'K'	1/0.2mm	5 metre	Mini plug	Green		White				123-6306
'K'	1/0.2mm	10 metre	Mini plug	Green		White				123-6307
'n	1/0.2mm	1 metre	Mini plug	Black		White		70643599		363-0244
'J'	1/0.2mm	2 metre	Mini plug	Black		White				123-6308
'J'	1/0.2mm	5 metre	Mini plug	Black		White				123-6309
'J'	1/0.2mm	10 metre	Mini plug	Black		White				123-6310
'T'	1/0.2mm	1 metre	Mini plug	Brown		White		70643601		363-0266
'T'	1/0.2mm	2 metre	Mini plug	Brown		White		70043001		123-6311
'T'	1/0.2mm	5 metre	Mini plug	Brown		White				123-6312
'T'	1/0.2mm	10 metre	Mini plug	Brown		White				123-6313
T/C	Туре	Conductors	Cores		Reel Le	ngth	Allied	l code	RS o	rder code
, ,	7,000									
J		1/0.2mm	+Black/-White		25 met	res	70657	7194	827-	5980
J		1/0.2mm	+Black/-White		50 met	res	70657	7195	827-	5984
J		1/0.315mm	+Black/-White		25 met	res	70657	7198	827-	5993
J		1/0.315mm	+Black/-White		50 met	res	70657	7199	827-	5996
K		1/0.315mm	+Green/-White		25 met	res	70657	7200	827-	6000
K		1/0.315mm	+Green/-White		50 met	res	70657	7205	827-	6019
Т		1/0.315mm	+Brown/-White		25 met	res	70657	7208	827-	6028
Т		1/0.315mm	+Brown/-White	2	50 met	res	70657	7206	827-	6022
J		1/0.508mm	+Black/-White		25 met	res	70657	7197	827-	5990
J		1/0.508mm	+Black/-White		50 met	res	70657	7201	827-	6003
K		1/0.508mm	+Green/-White		25 met	res	70657	7203	827-	6012
K		1/0.508mm	+Green/-White		50 met	res	70657	7204	827-	6016
J		7/0.2mm	+Black/-White		25 met		70657			6006
K		7/0.2mm	+Green/-White		25 met	res	70657		827-	6025
Т		7/0.2mm	+Brown/-White	2	25 met		70657			6031
N		7/0.2mm	+Pink/-White		25 met	res	70657	7210	827-	6034

Thermocouples



	Conductors	Cores	Jacket	Reel Length	Allied Code	RS order code
Exten	sion:					
KX	7/0.2mm	+Green/-White	Green	10 metres	70657084	827-5615
KX	7/0.2mm	+Green/-White	Green	25 metres	70641729	236-3820
KX	7/0.2mm	+Green/-White	Green	50 metres	70657085	827-5619
KX	7/0.2mm	+Green/-White	Green	100 metres	70646156	611-7889
KX	7/0.2mm	+Green/-White	Green	200 metres	70657088	827-5628
	7/0.2	Ole al. (NATE:	Dis.	40	70044640	240 4752
JX	7/0.2mm	+Black/-White	Black	10 metres	70641640	219-4753
JX	7/0.2mm	+Black/-White	Black	25 metres	70657078	827-5592
JX	7/0.2mm	+Black/-White	Black	50 metres	70657079	827-5596
JX	7/0.2mm	+Black/-White	Black	100 metres	70641737	236-3915
JX	7/0.2mm	+Black/-White	Black	200 metres	70657081	827-5606
TX	7/0.2mm	+Brown/-White	Brown	10 metres	70641637	219-4703
TX	7/0.2mm	+Brown/-White	Brown	25 metres	70641734	236-3870
TX	7/0.2mm	+Brown/-White	Brown	50 metres	70657095	827-5653
TX	7/0.2mm	+Brown/-White	Brown	100 metres	70651749	762-1146
TX	7/0.2mm	+Brown/-White	Brown	200 metres	70657098	827-5662
NX	7/0.2mm	+Pink/-White	Pink	10 metres	70641635	219-4668
NX	7/0.2mm	+Pink/-White	Pink	25 metres	70657091	827-5637
NX	7/0.2mm	+Pink/-White	Pink	50 metres	70657089	827-5631
NX	7/0.2mm	+Pink/-White	Pink	100 metres	70657092	827-5640

	Conductors	Cores	Jacket	Reel Length	Allied Code	RS order code
Compensating	:					
VX (KCB)	7/0.2mm	+Green/-White	Green	10 metres	70657082	827-5609
VX (KCB)	7/0.2mm	+Green/-White	Green	25 metres	70641629	219-4551
VX (KCB)	7/0.2mm	+Green/-White	Green	50 metres	70657080	827-5603
VX (KCB)	7/0.2mm	+Green/-White	Green	100 metres	70641630	219-4573
VX (KCB)	7/0.2mm	+Green/-White	Green	200 metres	70657083	827-5612
VX (KCB)	13/0.2mm	+Green/-White	Green	10 metres	70657086	827-5621
VX (KCB)	13/0.2mm	+Green/-White	Green	25 metres	70657087	827-5625
VX (KCB)	13/0.2mm	+Green/-White	Green	50 metres	70657090	827-5634
VX (KCB)	13/0.2mm	+Green/-White	Green	100 metres	70651750	762-1152
U (RCA)	7/0.2mm	+Orange/-White	Orange	10 metres	70657096	827-5656
U (RCA)	7/0.2mm	+Orange/-White	Orange	25 metres	70646158	611-7902
U (RCA)	7/0.2mm	+Orange/-White	Orange	50 metres	70657097	827-5659
U (RCA)	13/0.2mm	+Orange/-White	Orange	10 metres	70641641	219-4769
U (RCA)	13/0.2mm	+Orange/-White	Orange	25 metres	70657093	827-5643
U (RCA)	13/0.2mm	+Orange/-White	Orange	50 metres	70657094	827-5647

Thermocouples



T/C Type	Conductors	Cores	Reel Length	Allied code	RS order code
KX	1/0.2mm	+Yellow/-Red	25 metres	70656106	814-0030
KX	1/0.2mm	+Yellow/-Red	50 metres	70656111	814-0049
KX	1/0.2mm	+Yellow/-Red	100 metres	70656109	814-0042
KX	7/0.2mm	+Yellow/-Red	25 metres	70656110	814-0046
KX	7/0.2mm	+Yellow/-Red	50 metres	70656113	814-0055
KX	7/0.2mm	+Yellow/-Red	100 metres	70656114	814-0058
KX	1/0.3mm	+Yellow/-Red	25 metres	70656104	814-0024
KX	1/0.3mm	+Yellow/-Red	50 metres	70656107	814-0033
KX	1/0.3mm	+Yellow/-Red	100 metres	70656108	814-0036
TX	1/0.3mm	+Blue/-Red	25 metres	70656121	814-0080
TX	1/0.3mm	+Blue/-Red	50 metres	70656126	814-0099
TX	1/0.3mm	+Blue/-Red	100 metres	70656124	814-0092
TX	1/0.2mm	+Blue/-Red	25 metres	70656125	814-0096
TX	1/0.2mm	+Blue/-Red	50 metres	70656128	814-0106
TX	1/0.2mm	+Blue/-Red	100 metres	70656129	814-0109

T/C Type	Conductors	Cores	Jacket	Reel Length	Allied code	RS order code
Extension:						
KX	7/0.2mm	+Yellow/-Red	Yellow	25 m	70656102	814-0018
KX	7/0.2mm	+Yellow/-Red	Yellow	100 m	70656105	814-0027
KX	7/0.2mm	+Yellow/-Red	Yellow	200 m	70656103	814-0020
JX	7/0.2mm	+ White/-Red	Black	25 m	70656096	813-9995
JX	7/0.2mm	+ White/-Red	Black	100 m	70656098	814-0005
JX	7/0.2mm	+ White/-Red	Black	200 m	70656099	814-0008
TX	7/0.2mm	+Blue/-Red	Blue	25 m	70656119	814-0074
TX	7/0.2mm	+Blue/-Red	Blue	100 m	70656122	814-0083
TX	7/0.2mm	+Blue/-Red	Blue	200 m	70656123	814-0086
Compensating	g:					
VX (KCB)	7/0.2mm	+Yellow/-Red	Yellow	25 m	70656127	814-0103
VX (KCB)	7/0.2mm	+Yellow/-Red	Yellow	100 m	70656130	814-0112
VX (KCB)	7/0.2mm	+Yellow/-Red	Yellow	200 m	70656131	814-0115