


drylin® R liner J200UMO-01

J200UMO-01-20

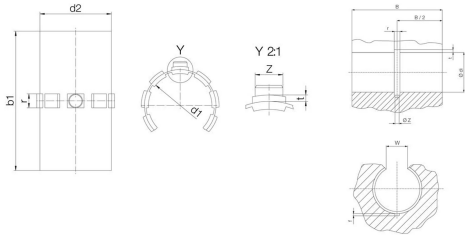

drylin® R liner J200UMO-01

- Material: iglidur® J200 with best running performance on aluminium
- Design: open, long design

Part number	J200UMO-01-20
Ø d1	20 mm
Ø d2	23 mm
r	5 mm
t	0.8 mm
Ø z	3.5 mm
B	45 mm
W	12 mm
r1	5 mm
t1	1 mm
f1	2 mm
Ø Z1	3.6 mm

Product description

Introducing the drylin R liner J200UMO-01, engineered with iglidur J200 material for optimal running performance on aluminum surfaces. Its open, long design ensures versatility and efficiency in various applications. Experience the perfect blend of durability and functionality with this innovative product, making it an essential choice for your needs.

Requirements

Mould-resistant according to DIN EN ISO 846 Procedure A	No
---	----

Physical properties

Max. long-term application temperature	90 °C
Lower application temperature	-50 °C



Manufacturing and installation tolerances

d1 tolerance	+0.030 +0.070mm
di tolerance	H7
B tolerance	h10
r1 tolerance	+0.5mm
t1 tolerance	+0.05mm
f1 tolerance	+0.1 mm

Dimensions

Ø d1	20 mm
Ø d2	23 mm
b1	44 mm
r	5 mm
t	0.8 mm
Ø z	3.5 mm
Ø di	23 mm
B	45 mm
t1	1 mm
f1	2 mm
Ø Z1	3.6 mm



Additional information and diagrams

