

SLION TAPE No.5933


【Super Butyl Adhesive Tape(Double-sided)】

《Feature》

Slion Tape No.5933 is a double-sided adhesive tape of CLAF® (non-woven polyethylene(PE) mesh) which is coated by superior waterproofing property butyl rubber pressure-sensitive adhesive (PSA) on both sides.

It is widely usable for the operation improvement of residential and many other waterproofing applications and the sound-proofing, since weather resistance, durability, cold resistance and heat resistance are also excellent and it adheres well to hard-to-bonding polyolefin and rough surfaces.

《Structure》

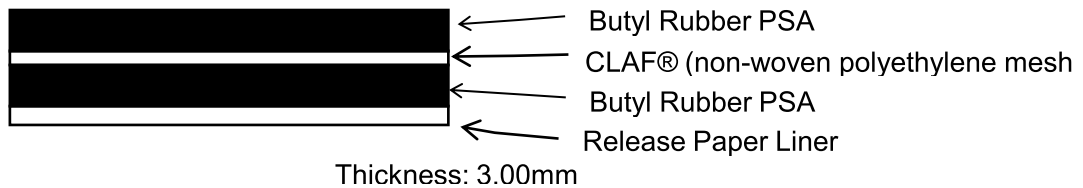

《Application》

- 1) For joint part sealing and packing of waterproofing fixing at construction and civil engineering
- 2) For temporary fixing of thermal insulation materials and joint part fixing and packing
- 3) For fixing of long length flooring materials and artificial lawn of outside use
- 4) For lamination process (to rubber sheet, foam, etc.)
- 5) For vibration proofing of sound equipment

《General property》

Test item	Unit	Value
Adhesion (to BA SUS plate)	N/10mm	15.68
Tack	Ball No.	45
Tensile Strength	N/10mm	39
Releasing force	N/10mm	0.1

Test methods:

The value of adhesion is in accordance with JIS Z -237 (2009).

The value of Ball tack is in accordance with Sliontec method.

Tensile strength is in accordance with JIS Z 0237 (2009)

Releasing force:

To press and adhere firmly to test specimen one round by 2 kg roller (pressing speed: 5 mm/S)

To measure peel adhesion of tape by peeling speed of 5 mm/S toward 180 degree angle as the release liner fixed.

**Specification is subject to change without notice.*

**All the figures, technical information and recommendation stated above are on the basis of the tests we believe to be reliable, but the accuracy thereof is not guaranteed.*

《Standard size and packing》

Width x Length	Rolls/carton
25mm×7m	20rolls
50mm×7m	10rolls
100mm×7m	4rolls

Note:

- 1) Please consult us when you require special sizes.
- 2) “Rolls/carton” may be changed without notice.

《Instruction for application》

- 1) Since sufficient adhesive force is not obtainable if the application surface is dirty, please apply tape after removing surface dirt, dust, moisture and oil.
- 2) Please press firmly after applying the tape to obtain enough adhesion.
- 3) During storage of the tape, avoid direct sunlight heat source, such as heating equipment, please keep in a cool place.
- 4) This tape is not an electrical insulation tape. Please do not use for electrical insulation purpose.
- 5) Please do not apply directly to the car body, furniture, walls, glass and PVC products since causing of discolor, adhesive residue and paint peel-off.
- 6) This tape is not an adhesive tape for skin. Since adhesive residue and rash may be caused, please do not apply the tape to the skin directly.
- 7) There are cases of contaminate the surface, causing the adhesive residue by the adherends. Please use on the check once when applying the tape to important and valuable things.
- 8) At the use, please verify whether the tape is suitable for your application.
- 9) All the figures stated above are example of test results and they are not guaranteed figures.
- 10) The lead-time is varied by conditions. Please inquire us for obtaining updated information.
- 11) The product specifications are subject to change without notice.
- 12) Please consult us in the case to use to special applications.
- 13) We cannot be held responsible for any damage incurred as a result of using. Please use after enough confirmation.

WARRANTY: All statements, technical information and recommendations that contained herein and submitted literatures are based on our research and experience, which we believed to be reliable, but such information or recommendations shall not constitute a warranty. The following is made IN LIEU OF ALL WARRANTIES, EXPRESSED OR IMPLIED: Our only obligation shall be to replace such quantity of the product proven to be defective provided that such defect is called to our attention in writing within 30 days of acceptance of the goods. We shall not be liable for any injury, loss, or damage, direct or consequential, arising out of the use or the inability to use the product. Before using, the user shall determine the suitability of the product for his intended use, and the user assumes all risk and liability whatsoever in connection therewith. Any statement or recommendation that are not contained herein shall have no force or effect unless otherwise in an agreement that is signed by one of our authorized officers. WE MAKE NO WARRANTY FOR THE PRODUCT THAT IS MERCHANTABLE OR SUITABLE FOR ANY PARTICULAR PURPOSE.

5933120214

Maxell, Ltd., Sliointec Division

3819 Noborito, Tama-ku, Kawasaki
Kanagawa 214-0014 Japan
Phone: 81-44-935-2485 Fax: 81-44-933-6915
<http://sliointec.maxell.co.jp/en>