




Datasheet

ENGLISH

RS ITEM NO 210-844

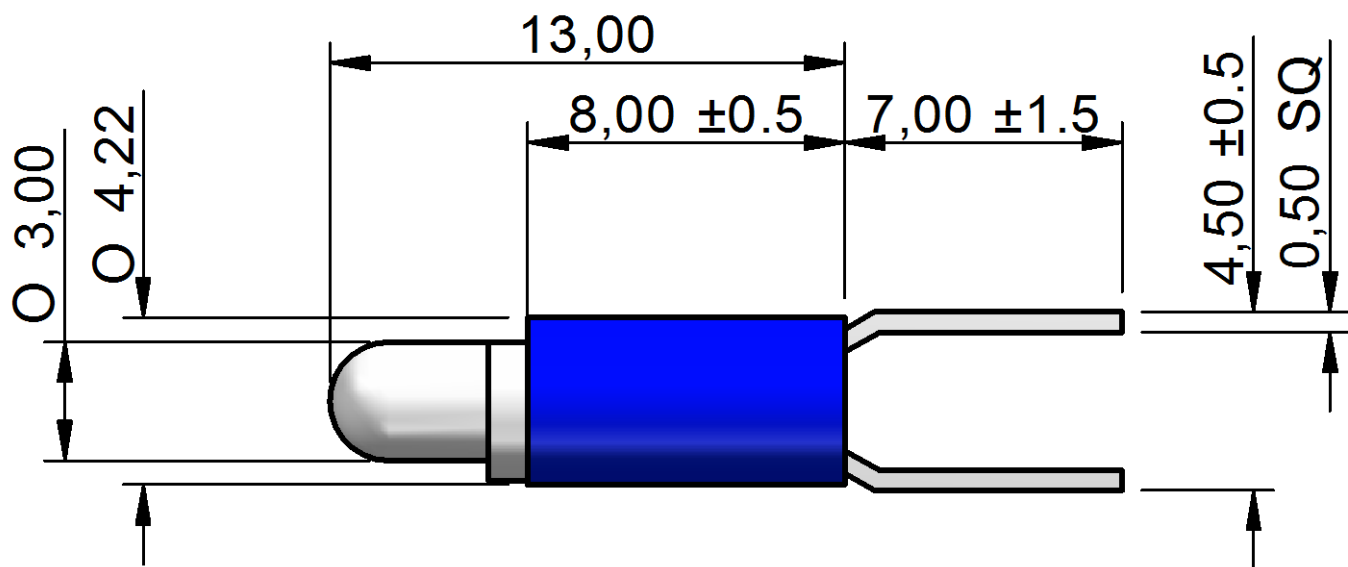

LED/Multiled	LED	Optimum voltage (V)	24vdc	Intensity	500mcd
Mounting Size		Rectifier			
Mounting Finish		AC current			
Protection		DC current	11mA		
Mount Holder	Bi-Pin	Voltage Tolerance(%)	10%		
Chip Qty	1	Optimum temperature (°C)	-30°C...+60°C		
Indicator colour	Blue	Storage temperature (°C)	-30°C...+60°C		
Wavelength (nm)	470	Contact Tab x 2	Bi-Pin		



Dimension in mm (typical), not to scale.
We reserve the right to make changes without further notice to this product to improve reliability, function or design.