

# RF / Coaxial Cable Assembly

## SMA Bulkhead Jack-to-MMCX Right Angle Plug, 200mm

# multicomp PRO


## RoHS Compliant




### Electrical Performance:

Impedance	: 50Ω
Frequency Range	: DC ~ 6.0 Ghz
Working Voltage	: 170Vrms Max.
Dielectric Withstanding Voltage	: 500Vrms Max.
Insulator Resistance	: 1000MΩ Min.

### Diagram

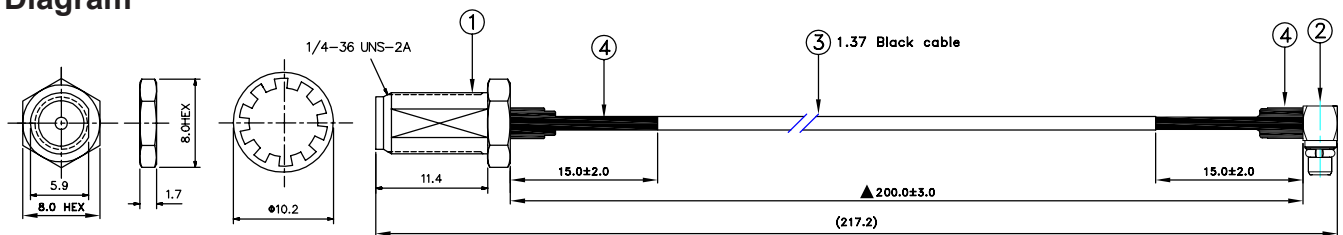


Specification	DC ~ 6.0 GHz
VSWR	1.65 : 1 Max.
Insertion Loss	-1.5 dB Max.




Dimensions : Millimetres

Sl.	Description	Qty
1	SMA B/H Jack Crimp for 1.37mm	1
2	MMCX Right Angle Plug for OD 1.37mm Cable	
3	1.37mm Black Cable	
4	Heat Shrink Tube F32 Ø2.5mm L=15mm Colour: Black	


1 PCS/1PE BAG SIZE:4.5"x3.5"

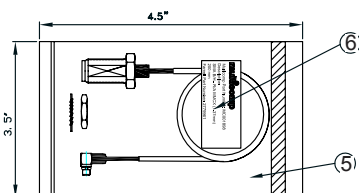

⑥ 3.5"x4.5" PE BAG LABLE SIZE:60x40mm

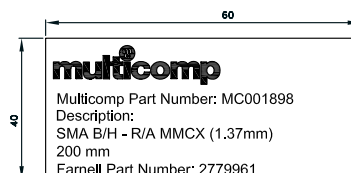

⑧ 11"x13" PE BAG LABLE SIZE:40x15mm



Newark.com/multicomp-pro  
Farnell.com/multicomp-pro  
Element14.com/multicomp-pro

# multicomp PRO