

i2500-18 and i2500-10 iFlex™ Flexible Current Probes

Unprecedented measurement flexibility

The new Fluke iFlex™ flexible current probes expand the measurement range of the select Fluke meters to 2500 A ac while providing the ultimate measurement flexibility. The iFlex™ probes connect directly to the meter, displaying current measurements without error prone scaling factors. The 1.8 m (6 ft) cord allows separation between the measurement location and the clamp meter making it easier to view the display. The large loop size and thin cross section allow measurement of awkward sized conductors and improved access in crowded spaces. Available in 25 cm (10 in) and 45 cm (18 in) sizes.



Technical Data

Measurement capability

- 2500 A ac current measurement with select Fluke meters
- Works with frequency, inrush, and min/max functions on select Fluke meters

Features

- Expands the measurement range to 2500 A ac while providing increased display flexibility, ability to measure awkward sized conductors and improved wire access
- CAT IV 600 V, CAT III 1000 V safety rating
- 7.5 mm coil diameter allows measurement in tight spaces
- Ergonomic design allows easy operation with one hand
- 1.8 m (6 ft) cable
- Three-year warranty

Specifications


| i2500-18 and i2500-10 | Range | Resolution | Accuracy |
|-------------------------------------------------------------------------|------------------------------|------------|------------------|
| AC current* | 2500 A | 0.1 A | 3 % ± 5 digits** |
| Frequency* | 500 Hz | 0.1 Hz | 0.5 % ± 5 digits |
| External magnetic field rejection (with cable >10 cm from the coupling) | 40 dB | | |
| Inrush* | • | | |
| Safety rating | CAT III 1000 V, CAT IV 600 V | | |

*When used with compatible Fluke meter. Accuracy stated includes probe and meter accuracy.
 ** For position accuracy at non-optimum positions, see Position sensitivity specifications table "A".

Ordering information

i2500-10 iFlex™ Flexible Current Probe, 25 cm (10-inches)
i2500-18 iFlex™ Flexible Current Probe, 45 cm (18-inches)

For use with any Fluke product that accepts the iFlex™ connector.

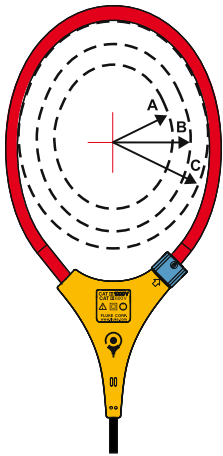

Position sensitivity

Position sensitivity specifications

| Distance from optimum | i2500-10 | i2500-18 | Additional iFlex™ Error |
|-----------------------|----------|----------|-------------------------|
| A | 12.7 mm | 35.6 mm | ± 0.5 % |
| B | 20.3 mm | 50.8 mm | ± 1.0 % |
| C | 35.6 mm | 63.5 mm | ± 2.0 % |

Measurement uncertainty assumes centralized primary conductor at optimum position, no external electrical or magnetic field, and within operating temperature range.



Fluke. Keeping your world up and running.®

Fluke Europe B.V.
 P.O. Box 1186
 5602 BD Eindhoven
 The Netherlands
 Web: www.fluke.eu

For more information call:
 In Europe/M-East/Africa +31 (0)40 2 675 200
 or Fax +31 (0)40 2 675 222

Fluke (UK) Ltd.
 52 Hurricane Way
 Norwich, Norfolk
 NR6 6JB
 United Kingdom

Tel.: (020) 7942 0700
 Fax: (020) 7942 0701
 E-mail: industrial@uk.fluke.nl
 Web: www.fluke.co.uk/clamps

©2010 Fluke Corporation.
 Specifications subject to change without notice.
 Pub_ID: 11675-eng

Modification of this document is not permitted without written permission from Fluke Corporation.