




ENGLISH

Datasheet

RS Pro Steel Alloy Compression Spring, 53mm x 5.4mm, 0.11N/mm

RS Stock No: **751-433**

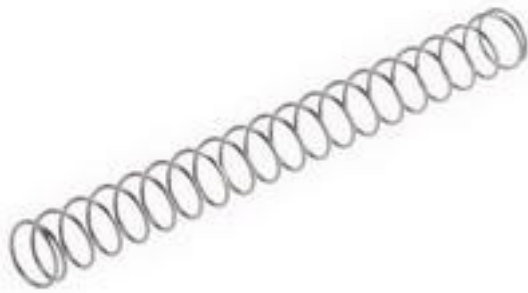

Product Details

RS Pro stainless steel alloy compression spring measures 53 x 5.4 mm and has a spring rate of 0.11 N/mm. It handles a load of 4.36 N at a minimum working length of 12.8 mm. This spring features right hand helix construction.

Features and Benefits

- Wire diameter ends up to 0.8 mm are squared and ungrounded
- Wire diameter ends 1 mm and over are squared and ground
- Manufactured with a right hand helix



Specifications:

Ends	Closed (Square)/Unground
Material	Steel Alloy
Free Length	53 mm
Load at Minimum Working Length	4.36 N
Minimum Working Length	12.8 mm
Outside Diameter	5.4 mm
Spring Rate	0.11 N/mm
Wire Diameter	0.4 mm