

ENGLISH


Datasheet

5 x 20mm T Cartridge Fuse, 1.25A, 250 V

RS Stock number 610-9945



Dimensions: (mm)




Specifications

BREAKING CAPACITY: 35A OR 10In WHICHEVER IS GREATER

ELECTRICAL CHARACTERISTICS:

| | RATING | BLOWING TIME | |
|--------|--------|--------------|-----------|
| KATING | | 32-100mA | 125mA-15A |
| 2.1In | Max | 2min | 2min |
| 2.75In | Min | 200ms | 600ms |
| | Max | 10sec | 10sec |
| 4In | Min | 40ms | 150ms |
| | Max | 3sec | 3sec |
| 10In | Min | 10ms | 20ms |
| | Max | 300ms | 300ms |

50T RoHS 1-T CHARACTERISTICS CURVE

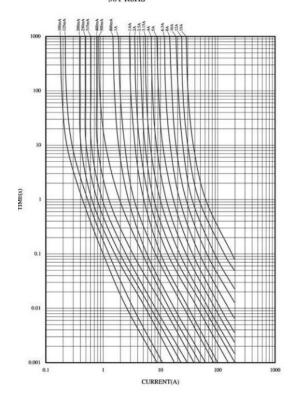

RS, Professionally Approved Products, gives you professional quality parts across all products categories. Our range has been testified by engineers as giving comparable quality to that of the leading brands without paying a premium price.