


## Datasheet

### SPDT Slide Switch

RS Stock number 734-7277

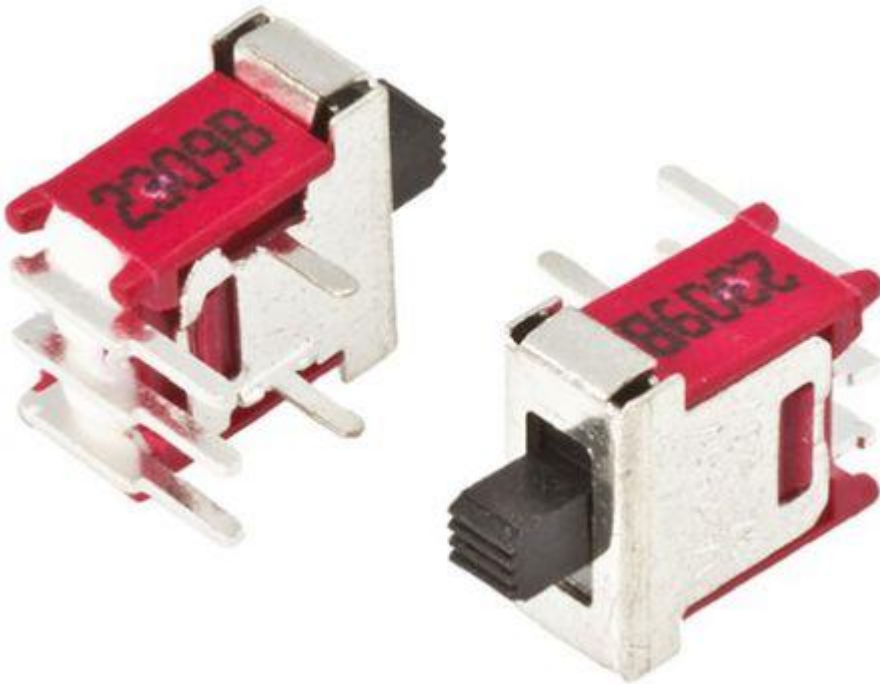

#### SPECIFICATIONS

**MECHANICAL LIFE:** 30,000 make-and-break cycles.

**CONTACT RESISTANCE:** 20m $\Omega$  max. initial @ 2-4VDC  
100mA for both silver and gold plated contacts.

**INSULATION RESISTANCE:** 1,000M $\Omega$  min.

**DIELECTRIC STRENGTH:** 1,000 V RMS@sea level.

**OPERATING TEMPERATURE:** -30° C to 85° C.

#### MATERIALS

**CASE:** Dially phthalate (DAP) (UL94v-0).

**ACTUATOR:** Nylon,black std.

**HOUSING:** Brass,tin plated.

**CONTACT:** Silver or gold plated.

**TERMINALS:** Gold or silver plated copper alloy.


#### RATING :

R : 0.4 Volt-Amps(VA) max. @20V max.(AC or DC)

Q : 1Amp with resistant load@250VAC

3Amps with resistant load @120 VAC or 28 VDC

Dimensions – inch  
mm

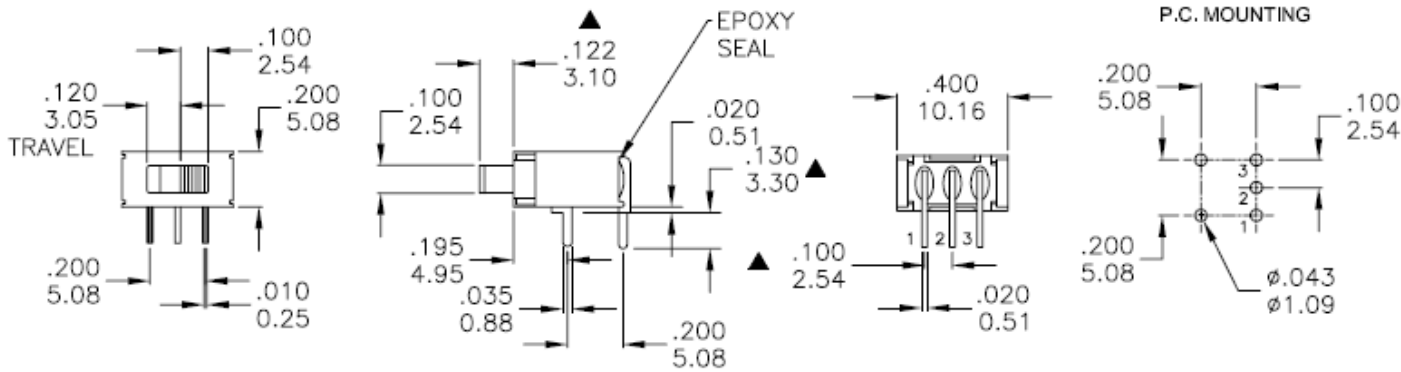

Model No.	POS.1	POS.2	POS.3
5FS3	ON	OFF	ON
Term. Comm.	2-1	OPEN	2-3
SCHEMATIC			

SWITCH FUNCTION