
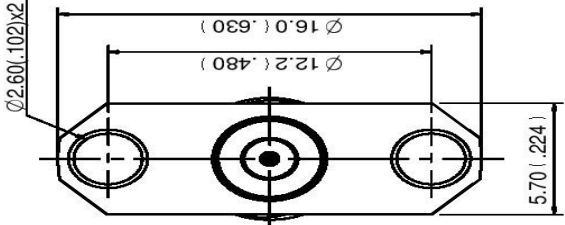
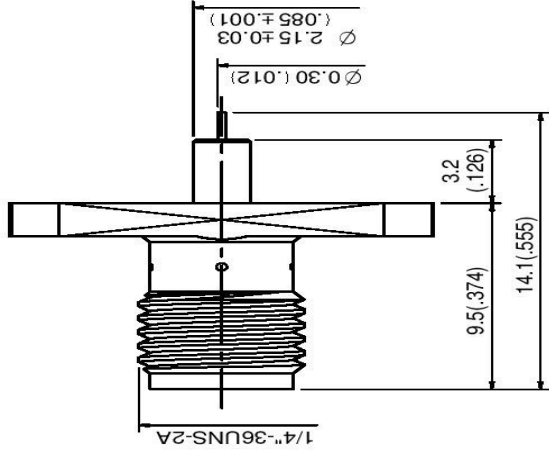


Datasheet

Stock No:1706948

RS Pro

SMA 27G 2 HOLE FLANGE MOUNT JACK RECEPTACLE

APPROVED

by _____ DATE: _____

1.0 ELECTRICAL

1.1 FREQUENCY RANGE: DC - 26.5 GHz

1.2 NOMINAL IMPEDANCE: 50 OHMS

1.3 VOLTAGE RATING: 500 VOLTS MAX.

1.4 VSWR: 1:17 MAX. @ 18 GHz
1.2 MAX. @ 26.5 GHz

2.0 MATERIALS

2.1 BODIES: STAINLESS STEEL PER JIS SUS 303

2.2 CENTER CONTACT: BERYLLIUM COPPER PER ASTM B196 UNS C1730

2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

3.0 FINISHES AND OTHERS

3.1 SEE BELOW TABLE FOR DETAILS.

4.0 MECHANICAL

4.1 INTERFACE IN ACCORDANCE WITH: MIL-STD-348A

5.0 ENVIRONMENTAL

5.1 OPERATING TEMPERATURE RANGE: -65 C TO +165 C

NO	DESCRIPTION	MATERIAL	QTY	FINISH
3	CENTER CONTACT	BERYLLIUM COPPER	1	GOLD 50 μ" MIN.
2	INSULATION	TEFLON	1	NONE
1	BODY	STAINLESS STEEL	1	GOLD 3 μ" MIN.

製圖	檢閱	認定	DESCRIPTION	TOLERANCE	品名	ROHS COMPLIANT	DATE	REV.
Jackie	Arc	Jenny	SMA 27G 2 HOLE FLANGE MOUNT JACK RECEPTACLE	X ±0.2 XX ±0.1 XXX ±0.05	40620208500004	(50Ω)	12.27.17	A-0
				ANGLE ± 5°	UNIT: mm(in)	DWG. NO. 52-0017-Z		
					SCALE 4:1			

