

RS PRO Sprockets British Standard Pilot


Bore 3/8" x 7/32" Steel C45, UNI7845

RS Stock No: see below



ENGLISH

RS Stock No	No. Teeth	Outside Diam.	Pitch Diam.	Simplex			Duplex			Triplex		
				dm	D1*	A	dm	D1*	A	dm	D1*	A
184870	13	43	39.8	28	10	25	28	10	25	28	10	35
184886	15	49.3	45.81	34	10	25	34	10	25	34	12	35
183726	17	55.3	51.83	40	10	28	40	12	30	40	12	35
183704	18	58.3	54.85	43	10	28	43	12	30	43	12	35
183675	19	61.3	57.87	45	10	28	46	12	30	46	12	35
183681	21	68	63.91	48	12	28	52	12	30	52	14	40
183697	23	73.5	69.95	52	12	28	58	12	30	58	14	40
184375	24	77	72.97	54	12	28	61	12	30	61	14	40
184072	25	80	76	57	12	28	64	12	30	64	14	40
183710	27	86	82.04	60	12	28	70	12	30	70	14	40
184381	28	89	85.07	60	12	28	73	12	30	73	14	40
184088	30	94.7	91.12	60	12	30	79	12	30	79	14	40
184094	38	119.5	115.3	70	16	30	90	16	30	90	16	40

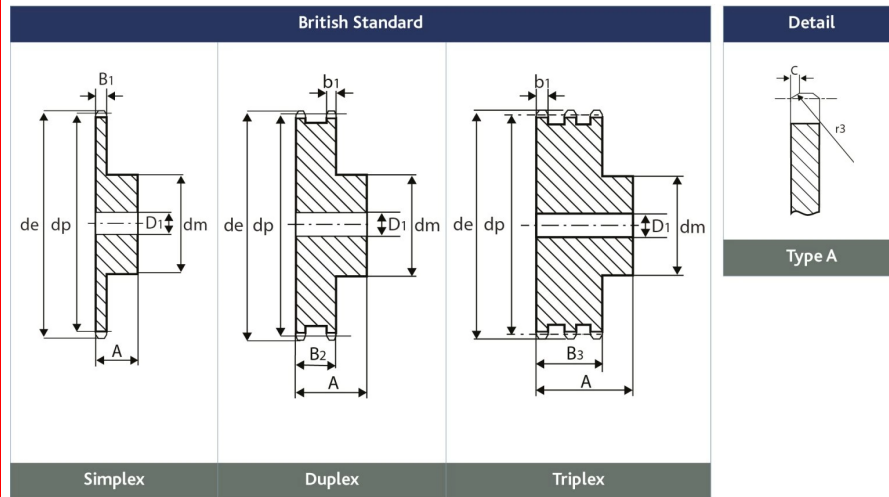

Bore \varnothing H12

All dimensions in mm. Intermediate sizes & special sprockets to drawing up to 1000mm diameter. Standard to ISO/R 606

Stock sizes

Available on short delivery

Tooth Radius $r_3 = 10$

Radius size $C = 1.0$

Tooth width $B_1 = 5.3$

Tooth width $b_1 = 5.2$

Tooth width $B_2 = 15.4$

Tooth width $B_3 = 25.6$

All dimensions in mm

Intermediate sizes & special platewheels to drawing up to 1000mm diameter

Standard: to DIN 8187 ISO/R 606

Please note: All dimensions including bore sizes subject to change.

If a dimension is critical to your application, please contact our sales department for confirmation.

For [special sprockets](#) or [reworked](#) sprockets please contact our manufacturing department.

RS, Professionally Approved Products, gives you professional quality parts across all products categories. Our range has been testified by engineers as giving comparable quality to that of the leading brands without paying a premium price.