


NO	DESCRIPTION	DATE
①	BACKGROUND FORMAT UPDATED	03.08.03'
②	BACKGROUND FORMAT UPDATED	03.31.10'
③	WORKING VOLTAGE → VOLTAGE RATING DEL PROOF VOLTAGE	09.22.14'

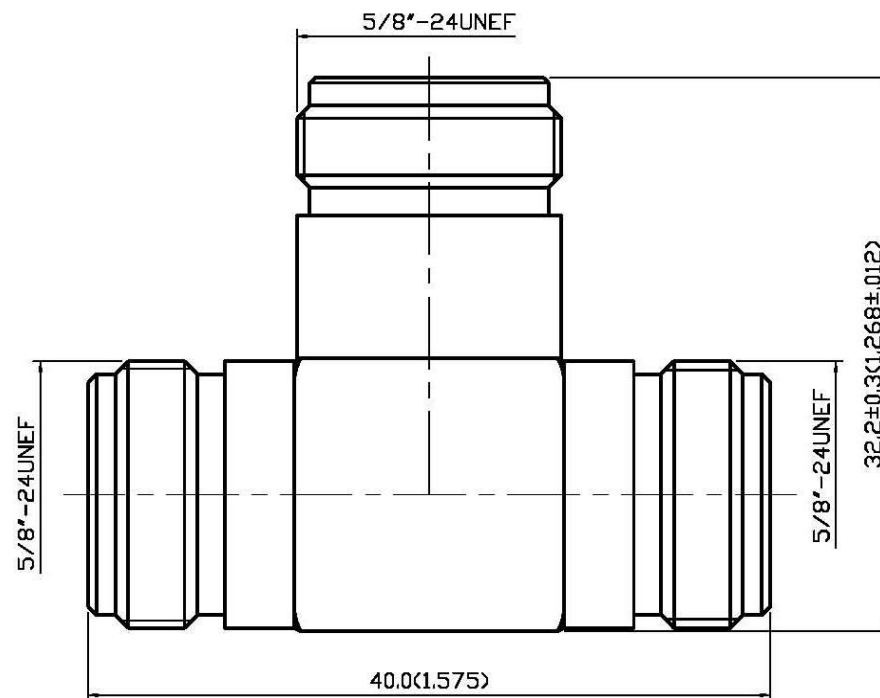

1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-11 GHz
- 1.2 NOMINAL IMPEDANCE: 50 OHMS
- 1.3 VOLTAGE RATING: 1000 VOLTS MAX. ③

2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BRASS PER JIS-C3604
- 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

3.0 FINISHES AND OTHERS

- 3.1 SEE BELOW TABLE FOR DETAILS.

4.0 MECHANICAL

- 4.1 INTERFACE IN ACCORDANCE WITH: MIL-STD-348A

5.0 ENVIRONMENTAL

- 5.1 OPERATING TEMPERATURE RANGE: -65° C TO +165° C

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
6	BODY II	BRASS	1	NICKEL 100μ" MIN.
5	CHASSIS	BRASS	1	NICKEL 100μ" MIN.
4	CENTER CONTACT II	BRASS	1	GOLD
3	CENTER CONTACT I	BRASS	1	GOLD
2	INSULATION	TEFLON	3	NONE
1	BODY I	BRASS	1	NICKEL 100μ" MIN.

APPROVED

by _____ DATE: _____



DESCRIPTION		N TEE ADAPTER JACK-JACK-JACK	
製圖	DRAWN <i>Yoko</i>	TOLERANCE .X ±0.2	品名 11-26 T.G.N
檢圖	CHECK <i>Arc</i>	.XX ±0.1	TITLE \\ROHS COMPLIANT <50Ω>
認定	APPROVAL <i>Jenny</i>	.XXX ±0.05	DATE 07.02.98'
		ANGLE ±5°	版次 A-3
		比例 3:1	UNIT mm(in)
			DWG.NO. 11-0230