


FEATURES

- Power and data combined
- 2 core data cable incorporated
- Neater, quicker install
- Time saver
- Suitable for all leading brands of EV chargers that require data connectivity
- Hard wired data connectivity
- Easier to route through walls and buildings
- Galvanised Steel Wire Armour (SWA)
- Manufactured in the UK

RS PRO EV-ULTRA 3C 4.0 SWA

RS Stock No.: 222-1598

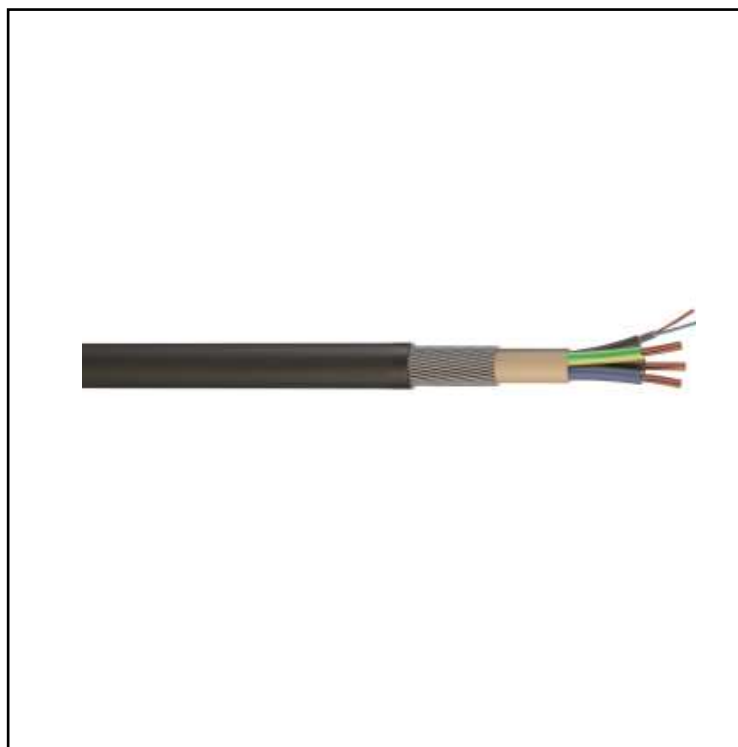

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Cables and Wires

Product Description

This cable is designed for use in the installation of electric vehicle charge points. The cable incorporates power conductors and a 2 core screened data cable, with a steel wire armour for extra protection.

Whilst designed for use in electric vehicle charge points, the cable is also suitable for other installations where power and a 2 core data/signal cable is required.

These cables are designed to be installed in air, clipped to surface, on cable tray/ladder work and embedded in concrete. The cables can be laid direct in the ground.

General Specifications

Conductor	Plain Annealed Copper Class 2 Stranded to BS EN
Insulation Bedding	60228 Thermosetting XLPE Type GP8 to BS 7655-1.3
Data Cable	CarbonTek Bedding Compound
Steel Wire	2 Core 'Super Screened' Data
Armour Sheathing	Cable Galvanised steel wire
	CarbonTek Heat Resisting PVC

Mechanical Specifications

Minimum Operating Temperature	-15°C
Maximum Operating Temperature	90°C
Minimum bend radius	8 x diameter

Electrical Specifications

Max. current carrying capacity	45A
Voltage drop (mV/A/m)	12

Approvals

Declarations	MFR Declaration of Conformity
Hazardous Area Certification	n/a
Standards Met	Generally to BS5467

Similar Products

Stock No.	Brand	Product Name			
222-1595	RS PRO	EV-ULTRA3C4.0	3 x 4.0mm ²	2 Core data	
222-1598	RS PRO	EV-ULTRA3C4.0SWA	3 x 4.0mm ²	2 Core data	SWA
222-1599	RS PRO	EV-ULTRA3C6.0	3 x 6.0mm ²	2 Core data	
222-1602	RS PRO	EV-ULTRA3C6.0SWA	3 x 6.0mm ²	2 Core data	SWA
222-1596	RS PRO	EV-ULTRA3C4.0CAT5	3 x 4.0mm ²	4 pair CAT5 data	
222-1597	RS PRO	EV-ULTRA3C4.0CAT5SWA	3 x 4.0mm ²	4 pair CAT5 data	SWA
222-1600	RS PRO	EV-ULTRA3C6.0CAT5	3 x 6.0mm ²	4 pair CAT5 data	
222-1601	RS PRO	EV-ULTRA3C6.0CAT5SWA	3 x 6.0mm ²	4 pair CAT5 data	SWA