




Rating	10A 125V, 6A 250V AC 6A 250V ~ 16A 125VAC 1/3HP, 10A 250VAC 1/2HP													
Contact R	50m ohm Max.													
Insulation R	DC 500V 100M ohm Min.	<table border="1"> <tr> <td>Thickness</td> <td>X</td> <td>Y</td> </tr> <tr> <td>0.75...1.25</td> <td>19.2-0.1</td> <td>13+0.1</td> </tr> <tr> <td>1.25...2</td> <td>19.4-0.1</td> <td>13+0.1</td> </tr> <tr> <td>2...3</td> <td>19.3-0.1</td> <td>13+0.1</td> </tr> </table>	Thickness	X	Y	0.75...1.25	19.2-0.1	13+0.1	1.25...2	19.4-0.1	13+0.1	2...3	19.3-0.1	13+0.1
Thickness	X		Y											
0.75...1.25	19.2-0.1		13+0.1											
1.25...2	19.4-0.1	13+0.1												
2...3	19.3-0.1	13+0.1												
Dielectric Strength	AC 1500V 1 minute													
Operation Temperature	-20°C~85°C													
Circuit	2P SPST ON-OFF													

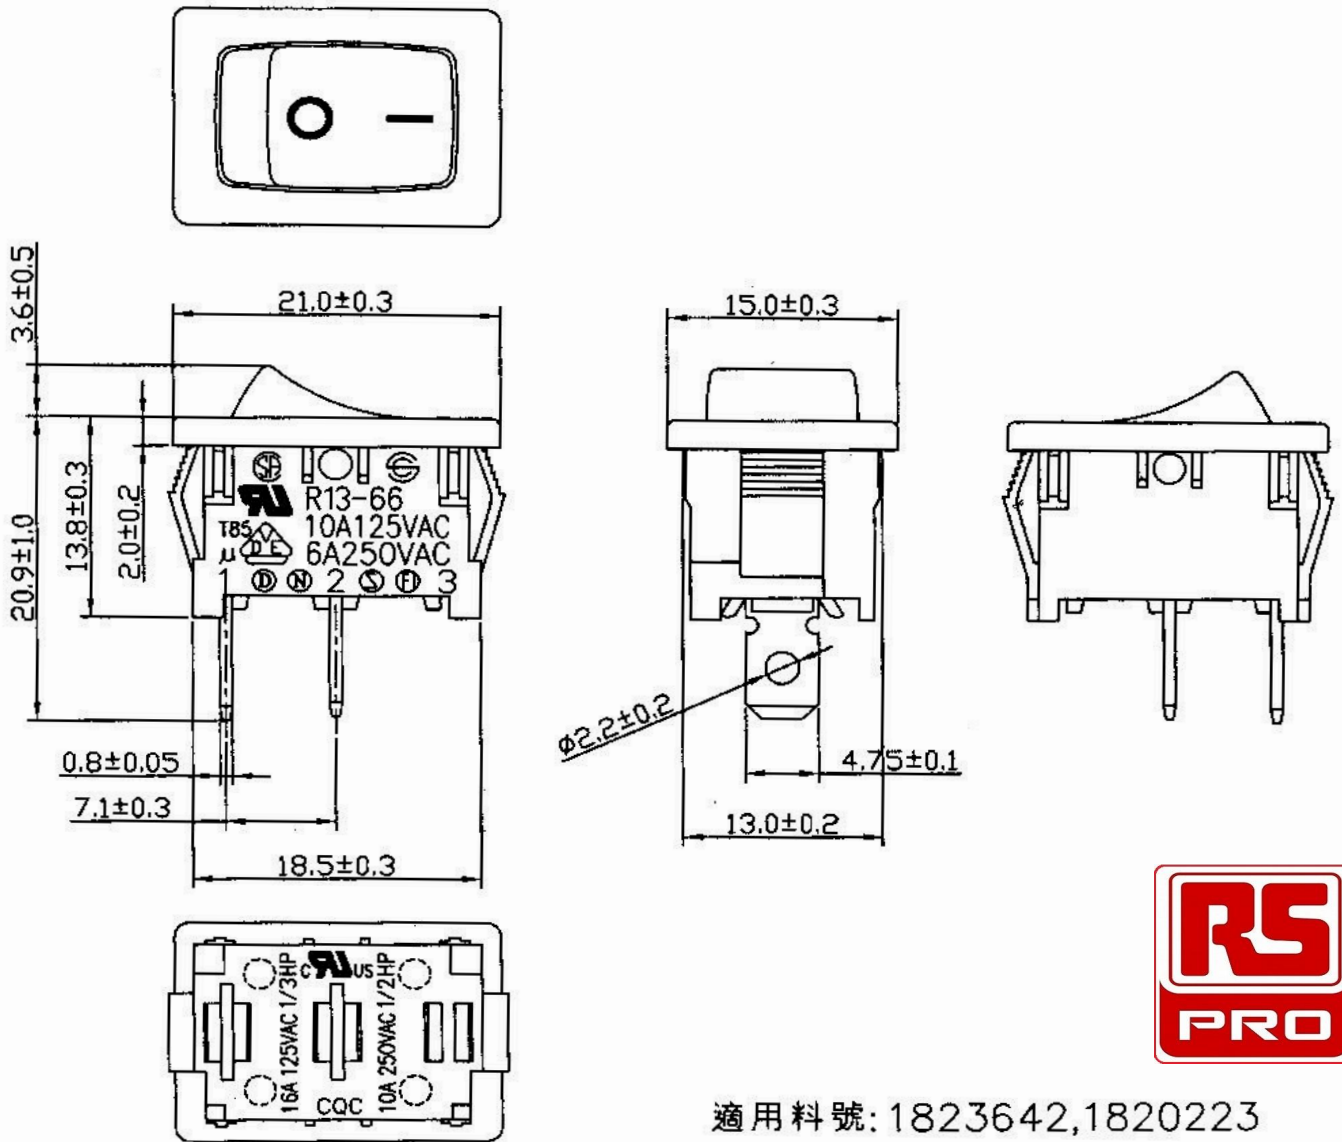

適用料號: 1823642, 1820223

ID	07/07-06	Cindy	IN	pdm	CIN-PDM R13, R12-66A (1823642, 1820223)	
△	Date	Name	Descriptions			
Drawing	Check	Approval	SCI No.		Model Name	ROCKER SWITCH
徐洲迎	07/11/06	<i>[Signature]</i>	Customer No.		Model No.	R13-66A
6/15/06	6/20-06	6/28-06	Unit	mm	SHIN CHIN INDUSTRIAL CO., LTD.	