




ENGLISH

Datasheet

RS Pro Heat Shrinkable Spade Terminals 'HB' (Brazed Type)

Stock Number: 125-1971

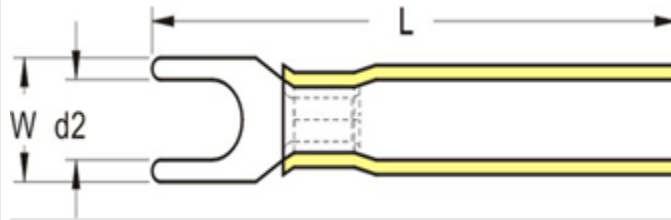

| WIRE RANGE A.W.G. / mm ² | ITEM NO. | STUD SIZE | | DIMENSION inch(mm) | | INSULATE D COLOR | Q'TY BOX |
|--|-----------|-----------|-----|--------------------|-------|------------------------|-------------|
| | | # | d2 | W | L | | |
| 22-16 A.W.G. | SHBL1-3.7 | #6 | 3.7 | 0.252 | 1.154 | RED | 1000 |
| 0.5-1.5 mm ² | | | | 6.4 | 29.3 | | |

Maximum Electric Current:

| | | | | |
|--------|----|----|----|----|
| A.W.G. | 22 | 20 | 18 | 16 |
| AMP. | 9 | 12 | 17 | 18 |

Maximum Electrical Rating: 600 V Max

Shrink Temperature: 150°C

Operating Temperature: -10°C - +105°C

Insulation Material: High Density PE

Terminal Material: Copper