

PVC CLEAR HOSE

PVC透明单管

用途: 适用于工农业、工程、渔业养殖、水族养殖等领域，常温下，一般工作压力的液体输送，也可用于门锁把柄保护套、工艺礼品包装及儿童配套产品。

特征: 本产品质轻价廉、柔软、有弹性、无毒、品质好。

适用温度: -5°C-65°C


APPLICATIONS:

The product is used for conveying liquid under the normal temperature and under the normal pressure in agriculture, engineer and fishing.

CHARACTERISTICS:

It is light, soft, elastic, non-toxic and high quality.

WORKING TEMPERATURE: -5°C-65°C

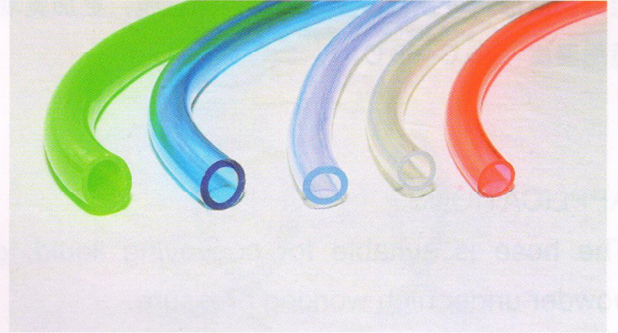

英寸 INCH	内径 ID MM	外径 OD MM	长度 LENGTH M/ROLL	重量 WEIGHT KG/ROLL	工作压力 W.P. BAR	爆破压力 B.P. BAR	体积 MEASUREMENT CBM
1/12"	2	4	100	1.2	3.0	9.0	0.004
1/8"	3	5	100	1.6	2.5	7.0	0.005
1/6"	4	6	100	2.0	2.0	6.5	0.008
1/5"	5	7	100	2.4	2.0	6.0	0.011
1/4"	6	8	100	2.8	2.0	6.0	0.015
5/16"	8	10	100	3.6	1.5	5.0	0.019
3/8"	9	11	100	4.0	1.5	5.0	0.024
3/8"	9.5	11.5	100	4.3	1.5	5.0	0.025
3/8"	10	12	100	4.5	1.5	5.0	0.026
1/2"	12	15	100	8.2	1.5	4.5	0.018
1/2"	12.7	15.7	50	4.4	1.5	4.5	0.019
5/8"	15	18	50	5.0	1.5	4.0	0.032
5/8"	16	19	50	5.5	1.5	4.0	0.034
3/4"	19	22	50	6.5	1.0	3.0	0.040
1"	25	29	50	11.0	1.0	3.0	0.068
1-1/4"	32	38	50	21.5	1.0	3.0	0.119
1-1/2"	38	44	50	25.0	1.0	3.0	0.219
1-3/4"	45	53	50	40.0	1.0	3.0	0.253
2"	50	58	50	44.0	1.0	3.0	0.300
2-1/2"	64	74	30	70.0	1.0	3.0	0.038