




ENGLISH

Datasheet

Stock No: 222-4472

# RS Pro Clearance Gauge, 0.175 → 0.5 mm

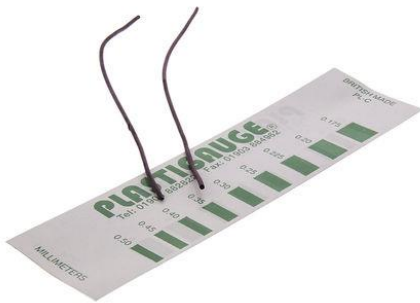

## Product Details

### Plastigauges

This provides a simple but accurate method for measurement of running/static clearance between hidden surfaces, such as big end or main bearings, pipe flanges, head gasket, high spots, housings, injection moulding tools etc.

Can highlight, clearance, lobing, ovality on shafts

Volumetric measurement takes surface roughness into account

Calibration card supplied

Clearance measurement 0.001in. to 0.020in. (0.025 to 0.5mm) can be taken.

Non corrosive and oil soluble

### Note

Care must be taken when measuring gaps below 0.00025in. (0.06mm) to achieve results.

### Supplied with

Plastigaugue is supplied in packs to suit clearance ranges. Care should be taken to select the correct range type.

## Specifications:

Maximum Measurement

0.5mm

Minimum Measurement

0.175mm